









A/C Stations
Air Conditioning Accessories
ATF Automatic Gearbox Service
Radiator Cleaning Units
Engine Decarbonization
Alternator Test Benches
Injector Cleaning Test Benches
Nitrogen Generators
Headlight Beam Testers
Tyre Lifter
Brake Bleeder
Heating Inductors
Pneumatic Spring Compressor

SPIN AUTOMOTIVE EXPERTISE

GATALOGIE 2022/2 PRICE LIST 1/11/22 - 31/3/23



SDIN AUTOMOTIVE















	MADE IN ITALY						a jui	a in
		BREEZE			EZE ANCE			ABUS ANCE
	Technical features	DUAL X4	DUAL	EV0	PLUS	BUS	R134a	MULTIGAS
1	Graphic display with icons	7" TOUCH Display	\checkmark	√	\checkmark	\checkmark	\checkmark	
2	Tank capacity	2 x 10,5 kg	2 x 10,5 kg	22 kg	22 kg	30 kg	40 kg	40 kg
3	Vacuum pump	100 lt/min	100 lt/min	170 lt/min	170 lt/min	170 lt/min	260 lt/min	260 lt/min
4	Heater	BST System	BST System	BST System	BST System	automat.	automat.	automat.
5	Compressor capacity	2 x 400 gr/min	400 gr/min	400 gr/min	400 gr/min	600 gr/min	1000 gr/min	1000 gr/min
6	Automatic recovery	\checkmark	√	\checkmark	V	V	\checkmark	\checkmark
7	Automatic oil discharge	\checkmark	√	V	V	V	\checkmark	\checkmark
8	Programmable vacuum	$\sqrt{}$	√	V	V	V	$\sqrt{}$	√
9	Programmable vacuum test	$\sqrt{}$	√	V	V	V	$\sqrt{}$	√
10	Oil/additive standard injection, with scale	6 injectors	3+1 injectors	3 injectors	3 injectors	3 injectors	2 injectors	2 injectors
11	Injection oil/additive for hybrid vehicles, with scale	√	√	V	V	V	-	-
12		√	√	V	V	V	-	-
13	Automatic gas charge	BST System	BST System	BST System	BST System	V	√ reinforced p	ump (optional)
14	Automatic pressure test	√	Manual	V	Manual	Manual	Manual	Manual
15	Guided charge compensation manual WSC	\checkmark	-	V	-	-	-	-
16		√	-	V	-	-	-	-
17	Built-in database (cars, industrial vehicles, agricultural machines)	√	√	$\sqrt{}$	V	V	√	V
18		√	100 entries	100 entries	100 entries	100 entries	100 entries	100 entries
19	Automatic selection of charging hoses	4 tubi / 4 hoses	-	$\sqrt{}$	-	-	-	-
20	Discharge of incondensable gases	Manual/Automat.	Manual	Manual/Automat.	Manual	Manual	Manual	Manual
21	Automatic internal cleaning	$\sqrt{}$	√	V	V	V	$\sqrt{}$	√
22	(with kit 01.000.96 on request)	√	√	V	V	V	√	√
23	Software for recycling cleaning (VW, Audi) (with kit 01.000.139 on request)	√	√	V	V	V	√	√
24	Lookaga taat with nitragan	√	√	V	V	V	√	√
25	Gas analyzer HF01234YF	optional	optional	optional	optional	optional	-	-
26	Phase and alarm lights	optional	optional	optional	optional	optional	optional	optional
27	Database update via USB	\checkmark	√	V	V	V	√	√
24 25 26 27 28		√	√	V	-	V	-	-
29	CSP: Vehicle compressor protection with LP charge	√	-	V	-	-	-	-
30 31 35 37	Automatic gas recovery from hoses	√	-	V	-	-	-	-
31	CST: Smart hose length compensation	√	-	\checkmark	-	-	-	-
35	Built-In WiFi module + SD Card (with kit 01.000.328 on request)	optional	optional	-	optional	optional	optional	optional
	HF01234YF Version	\checkmark	√	optional	optional	-	-	-
38	Printer	√	√	V	optional	optional	optional	optional
38	Dimensions, cm	62x57x132	56x61x132	56x61x132	56x61x132	56x61x132	50x91x139	50x91x139
40	Weight, kg	125	115	90	90	110	200	200





The pictures have merely explanatory purposes and can be changed with no warning

BREEZE X4



SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



€220,00

*to be ordered at the same time as the A/C station

Breeze X4 Dual Touch Cod. 01.001.44

€6.900,00

Automatic A/C station for R134a and HF01234yf gas

Touch Screen	7"
Tank capacity	2 x 10,5 kg
Vacuum pump	100 lt/min
Compressor capacity	2 x 400 gr/min
Injection oil/additive by standard/ hybrid vehicles with scale	2 x 3


- Easy HMI (Human-Machine Interface) facilitated by a 7" touch screen and an icon-view software (A)
- No internal contamination between the gases: two separate circuits with 4 hoses, 2 for R134 and 2 for 1234yf; 2 evaporators, 2 compressors, 2 condensers, 2 filters, 2 tanks
- Separate circuits for the treatment of different oils: 3 channels for R134a with scale + 3 channels for HF01234yf with scale (standard, used, hybrid)
- · Automatic circuit washing at every oil change
- Easy charge in all temperature conditions thanks to the BST system (by SPIN)
- \bullet WSC (Winter-Summer-Compensation) function. Possibility to correct the amount of gas loaded by scrolling the +/- keys and using the HP/LP pressure control (B)
- Integrated database upgradeable from USB port
- Maximum efficiency during recovery thanks to the standard "MULTIPASS" function (C)
- Flushing cleaning of the A/C system (kit 01.000.96 on request) \in 360,00
- Recycling cleaning of the A/C system, AUDI/VW type (kit 01.000.139 on request) **§ 980,**00
- Optional R1234yf refrigerant analyzer compliant with SAE/ VDA norms (kit cod. 01.000.263) **€ 2.485.**⁰⁰
- Printer included
- · Scale lock





















BETTER PERFORMANCE IN RECOVERY AND CHARGE







Tank capacity	2 x 10,5 kg
Vacuum pump	100 lt/min
Compressor capacity	400 gr/min
Injection oil/additive by hybrid vehicles	3+1
4 quick couplings	2 x R134a / 2 x R1234yf
Printer	standard included

- A: 4.3" graphic display with icons
- · Double tank (2x10,5 kg) with 2 electronic scales
- Facilitated charge in each temperature condition with BST system (by SPIN)
- **B:** Built-in database (cars, trucks, agricultural machines) with possibility to upgrade
- . D: Hose length adjustment
- E: Printer included
- Automatic washing of the station's system at each gas change (time adjustable by the use)
- · Automatic leak test on power up
- F: Flushing cleaning of the A/C system (kit 01.000.96 on request) £360,00
- **G:** Recycling cleaning of the A/C system, AUDI/VW type (kit 01.000.139 on request) € 980.00
- H: Leakage test with nitrogen/hydrogen (kit 01.000.326 on request) €278,00
- I: User management
- L: Optional R134a / R1234yf dual refrigerant analyzer compliant with SAE / VDA norms (cod. 01.000.263) € 2.485,00
- M: Standard and Hybrid oil management with automatic cleaning of the hoses
- N: Multilingual software
- 0: Data download from USB port
- Scale lock
- WiFi module for data transmission / reception kit 01.000.328 on request*

Please see the page 2 for more technical features

SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



€220,00

*to be ordered at the same time as the A/C station

Automatic A/C station for R134a and HF01234yf gas

Breeze Advance DUAL Printer Cod. 01.001.43

€5.100,00



SDIN AUTOMOTIVE EXPERTISE



























OPTIONAL ACCESSORIES



COD. 01.000.96



COD. 01.000.139



COD. 01.000.326



COD. 01.000.263

BREEZE



Dispaly	graphic
Tank capacity	22 kg (30 kg - for the BUS model) with automatic heater
Vacuum pump	170 lt/min
Compressor capacity	400 gr/min (600 gr/min - modello BUS)
Injection oil/additive by hybrid/ standard vehicles	with scale (3 injectors)
Printer	optional (mod. PLUS / BUS) standard (mod. EVO) €140,00

- A: 4.3" graphic display with icons
- B: Built-in database (cars, trucks, agricultural machines) with possibility to upgrade
- Facilitated charge in each temperature condition with BST system (mod. PLUS / EVO)
- C: Pressure test with charge adjustment (manual WSC) mod. EVO
- D: Hose length adjustment
- E: Printer included (mod. EVO)
- F: Flushing cleaning of the A/C system (kit 01.000.96 on request) €360,00
- G: Recycling cleaning of the A/C system, AUDI/VW type (kit 01.000.139 on request) €980,00
- H: Leakage test with nitrogen/hydrogen (kit 01.000.326 on request) €278,00
- I: User management
- L: Automatic Multipass (mod. EVO)
- M: Standard and Hybrid oil management with automatic cleaning of the hoses
- . N: Multilingual software
- 0: Integrated USB for data download
- Scale lock
- Optional WiFi module for data transmission / reception kit 01.000.328* (mod. PLUS / EVO)

SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



*to be ordered at the same time as the A/C station

Please see the page 2 for more technical features

BREEZE Advance PLUS

R134a Cod. 01.001.30 €3.880,⁰⁰

HF01234yf Cod. 01.001.36 €3.960,00

BREEZE Advance EVO Printer


R134a Cod. 01.001.32 €4.180,00

HF01234yf Cod. 01.001.35 €4.300,⁰⁰

BREEZE Advance BUS

Cod. 01.001.33









€4.430,⁰⁰



















MADE IN ITALY

	BASIC	PLUS	
Dispaly	graphic	graphic	
Tank capacity	12,5 kg	12,5 kg	
Vacuum pump	72 lt/min	72 lt/min	
Compressor capacity	300 gr/min	300 gr/min	
Injection oil/additive Standard	timed (2+1 injectors)	by scale (3+1 injectors)	
Injection oil/additive Hybrid	✓	✓	
Printer	optional €140 , ⁰⁰	optional €140 ,00	

- A:4.3" graphic display with icons
- B: Built-in database (cars, trucks, agricultural machines) with possibility to upgrade
- Facilitated charge in each temperature condition with BST System (by Spin)
- Standard and Hybrid oil/additive management (Multi-Oil System by SPIN) mod. BASIC
- . D: Hose length adjustment
- E: Printer on request
- F: Flushing cleaning of the A/C system (kit 01.000.96 on request) € 360,00
- G: Recycling cleaning of the A/C system, AUDI/VW type (kit 01.000.139 on request) €980,00
- H: Leakage test with nitrogen (kit 01.000.326 on request) €278,00
- I: User management
- . N: Multilingual software
- . 0: Integrated USB for data download
- Optional R1234yf refrigerant analyzer compliant with SAE / VDA norms with cod. 01.000.205 - €2.300,00
- · Scale lock
- Optional WiFi module for data transmission / reception kit 01.000.328*

Please see the page 3 for more technical features

SPIN CONNECT 4 Built-in WiFi module + SD Card Cod. 01.000.328* **€220**,00

*to be ordered at the same time as the A/C station

CLEVER Advance BASIC

€2.920,00 R134a Cod. 01.018.30 **€2.990**,00 HF01234yf Cod. 01.018.35

CLEVER Advance PLUS

R134a Cod. 01.018.32 **€3.240**,00 HF01234yf Cod. 01.018.37 **€3.320**,⁰⁰

OPTIONAL ACCESSORIES



COD. 01.000.96



COD. 01.000.139



COD. 01.000.326



COD. 01.000.205







Touch screen	5"
Tank capacity	18 kg
Vacuum pump	400 lt/min
Compressor capacity	170 gr/min
HP/LP Valves	automatic
Oil/additive injection + hybrid + electric	3+1 injectors with scale
Printer	standard





Touch screen	5"
Tank capacity	10,5 kg
Vacuum pump	300 lt/min
Compressor capacity	100 gr/min
HP/LP Valves	automatic
Oil/additive injection + hybrid + electric	3+1 injectors with scale
Printer	standard





Touch screen	5"
Tank capacity	10,5 kg
Vacuum pump	300 lt/min
Compressor capacity	72 gr/min
HP/LP Valves	manual (taps)
Oil/additive injection standard + hybrid	2+1 injectors timed (Multioil)
Printer	optional

Clever MIURA X Printer

R134a Cod. 01.018.71 €4.225,00

HF01234yf Cod. 01.018.73 €4.295,00

Clever MIURA M Printer

R134a Cod. 01.018.74 €3.725,00

HF01234yf Cod. 01.018.76 €3.795,00

Clever MIURA B

R134a Cod. 01.018.78 €3.225.00

HF01234yf Cod. 01.018.80 €3.295,⁰⁰

OPTIONAL ACCESSORIES FOR MIURA B



Cod. 01.030.08H

€ **140.**00

Printer for Clever MIURA B

Cod. 01.000.332

WiFi router kit for Clever Miura B

The pictures have merely explanatory purposes and can be changed with no warning

Tank capacity

Compressor

Vacuum pump

Scale lock

5" Touch screen

Oil/additive injection

standard+hybrid+electric

Automatic HP / LP valves





✓







1	1	B
	Į.	
	1	曼里
0	Ų	100

18 kg

400 gr/min

170 lt/min

3+1 injectors with scale*

CLEVER	CLEVER
Miura X	Miura M



manual





to PC
Integrated WiFi router for remo from smartphone
Remote control from smartph the free application downloada Play Store on Android and App iPhone / iPad
R1234yf analyser in accordan SAE/VDA
Multipass: Maximum efficiency recovery phase
Easy charging thanks to the BS
Automatic internal washing of at each oil change
Leakage test with nitrogen with 01.000.326 on request



1	_
	-
1000	委三
	A/C
	SOIN
/	
	V
2	

Automatic non-condensable gas discharge	√	√	optional	
Printer	✓	✓	optional	
Phase and alarm lights	✓	✓	✓	
Integrated database that can be updated with the USB Pen Drive	√	√	✓	
Ethernet output and cable for connection to PC	✓	✓	✓	
Integrated WiFi router for remote control from smartphone	√	✓	optional	
Remote control from smartphone with the free application downloadable from Play Store on Android and App Store on iPhone / iPad	√	√	optional	
R1234yf analyser in accordance with SAE/VDA	optional	optional	optional	
Multipass: Maximum efficiency in the recovery phase	✓	✓	-	
Easy charging thanks to the BST function	✓	✓	✓	
Automatic internal washing of the station at each oil change	✓	✓	Multioil	
Leakage test with nitrogen with kit 01.000.326 on request	✓	√	✓	
Software for flushing cleaning with kit 01.000.96 on request	✓	√	✓	
Software for recycling cleaning (VW, Audi) with kit 01.000.139 on request	✓	√	✓	
CSP: Car compressor protection during charging from LP output (Compressor Saving Protection)	✓	✓	-	
CST: Smart hose length compensation	✓	✓	✓	
Possibility of correcting the quantity of gas loaded through the LP/HP side (WSC System)	✓	✓	✓	
Automatic recovery of gas from the hoses after the pressure test	✓	✓	✓	
	I .	I .	i .	



^{*}Multioil System by SPIN

Dimensions/Weight

56,6 x 59 x 98 cm

75 Kg

56,6 x 59 x 98 cm

75 Kg


56,6 x 59 x 112 cm

85 Kg

THE DETAILS THAT MAKE THE DIFFERENCE

















- A: 5" Touch Screen with intuitive icons
- Automatic HP/LP valves*
- **B:** WSC function (Winter-Summer-Compensation): possibility of correcting the quantity of charged gas (by \wedge/\vee keys) and pressure control
- C: Max. recovery efficiency thanks to the standard Multipass function
- · Facilitated charge in each temperature condition with BST system
- D: Integrated database updateable by the USB key (from USB port on the control panel)
- E: Standard, electric and hybrid oil/additive injector**
- Automatic internal circuit washing at each oil change (PAG-POE)
- · WiFi router for remote control from smartphone*
- F: Remote control from smartphone (free app from Play Store for Android and App Store for iPhone/ iPad)*
- · Ethernet output and cable for PC connection
- · Phase and alarm lights
- · Vehicle compressor protection during low pressure charging from LP charge (CSP)*
- · Automatic recovery from the hoses at the end of the pressure test
- Flushing cleaning of the A/C system kit 01.000.96 on request €360,00
- Recycling cleaning of the A/C system, AUDI/VW type kit 01.000.139 on request €980,⁰⁰
- Leakage test with nitrogen/hydrogen kit 01.000.326 on request €278,00
- Optional R1234yf refrigerant analyzer compliant with SAE / VDA norms cod. 01.000.216 €2.143,00
- * Models X / M
- **Models X/M: 3+1 injectors; Model B: 2+1 injectors

OPTIONAL ACCESSORIES



COD. 01.000.96



COD. 01.000.139



COD. 01.000.326



COD. 01.000.216

with no warning



Automatic A/C station for agriculture and earth-moving machines

Tank capacity	10,5 kg		
Vacuum pump	72 lt/min		
Compressor capacity	300 gr/min		
Injection oil/additive	timed		
Printer	optional €140 ,00		
R1234yf version	on request		
12 V DC – 230 V AC	BIPOWER Version only		

- 4.3" graphic display with icons
- Database for cars, trucks, agricultural and earth-moving machines
- · Personal database (100 entries)
- Software for automatic A/C system flushing
- Heater
- · Scale locking system for transport
- · Charging hoses SAEJ 2196 of 5 m with LP and HP couplings and taps
- · Statistic software of refrigerants and oils
- · Database update via USB
- Power supply: 230 V AC
- Dimensions: 58x55x98 cm
- · Weight: 60 kg

THE DETAILS THAT MAKE THE DIFFERENCE:

- BIPOWER Version (230 V AC-12 V DC by inverter) on request
- · Transport handles for uneven grounds
- · Manual/automatic cycle graphic display
- A/C flushing cleaning with kit 01.000.96 on request €360,00
- · Recycling cleaning of the A/C system, AUDI/VW type with kit 01.000.139 on request €980,00
- · Leakage test under pressure with nitrogen with kit 01.000.326 on request € 278,00
- · Setting of the hose length
- · Software for internal cleaning of the station

Please see the page 3 for more technical features

Country Clima Advance Cod. 01.040.15

€3.290,00

Country Clima Adv BIPOWER

Cod. 01.040.17

€ 3.690,00



SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



€220,00

*to be ordered at the same time as the A/C station





Full automatic A/C station for buses

External tank capacity	40 kg (removable with automatic heating
Vacuum pump	260 lt/min
Compressor capacity	1000 gr/min
Injection oil/additive	timed
Printer	optional €140 ,00

- 4.3" graphic display with icons
- Database for cars, trucks, agricultural and earth-moving machines (user-modifiable)
- Personal database (100 entries)
- Software for automatic A/C system flushing
- D: HP / LP multiscale gauges (R134a, R22, R404, R407)
- G: Optional reinforced pump for a fast automatic charge (15lt /min) cod. 01.000.304 €715,¹⁰
- · H: Hoses length's setting
- A/C flushing cleaning (kit 01.000.96 on request) € 360,00
- I: Leakage test with nitrogen (kit 01.000.326 on request) €278,00
- J: Possibility to operate in manual or Full Automatic mode
- K: Hermetic air compressor (27cc capacity, 1000gr /min)
- L: Optional Printer
- M: Multilingual Software
- N: Software update with USB port

Please see the page 2 for more technical features

Astrabus Advance R134a

Cod. 01.006.03

€6.590,00


Astrabus Multigas

Cod. 01.007.03

 $\in 6.990,^{00}$



MADE IN ITALY

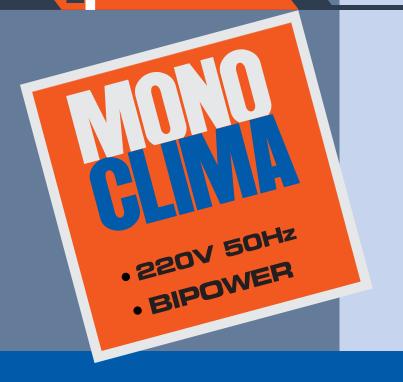



Manual a/c station for R134a for service on agricultural machines, earth-moving machines and boats with power supply 220V 50Hz or 12V DC (with Bipower kit)

- Compressor for recovery with automatic oil recovery system
- 3m³/h single/stage vacuum pump
- 4,4kg charge cylinder with heating resistance and safety valve
- Fresh oil injector
- 4-way manometric group with pressure gauges ø 80mm Pulse free
- Recovery capacity: 250gr/min
- Hose L=2mt
- Power supply: 220 V 50 Hz/12 V DC
- Dimensions: 50x40x115H cm
- Weight: 50 Kg







Version 12V DC-220V AC Cod. 01.009.02

Monoclima 220V 50Hz Cod. 01.009.01

€2.380,00

Monoclima BIPOWER 12V DC - 220V AC Cod. 01.009.02

€ 2.780,00



MADE IN ITALY





MOBILE REFRIGERATION

Full automatic A/C stations for the service of systems with refrigerants R404a/R407c (mobile refrigeration)

- · Graphic display
- 30 Kg tank
- 72 lt/min pump
- · Oilless compressor
- · Automatic recovery and charge
- · Timed automatic oil injection
- Suitable for refrigerators with capacity up to 12 kg
- · Graphic display
- · Printer (optional)
- · User management
- · Multilingual software
- Integrated USB for data download
- Dimensions: 59x61x112 cm
- Weight: 95 kg
- Transfer valve on external cylinder additional (cylinder not supplied)











MADE IN ITALY

Cod. 01.000.96

€360,00

FLUSHING KIT

Refilling flushing kit for a/c installations with freon R134





Cod. 01.000.235

€220,00

DIAGNOSIS KIT

Diagnosis kit for checking the oil status in A/C **R134a** systems



Cod. 01.000.236

€238,00

DIAGNOSIS KIT

Diagnosis kit for checking the oil status in A/C **R1234yf** systems

Cod. 01.000.240

€880,00

RECYCLING FLUSHING KIT

Recycling flushing kit for a/c installations (A) with the visualisation of the gas flow / reverse flow (B)





Cod. 01.000.139

€980,00

RECYCLING FLUSHING KIT

Recycling flushing kit for a/c installations (Audi/ VW-like) complete with external tank, hoses and case with by-pass adapters for expansions valves and filters



Cod. 01.000.265

€610,00

The case with adapters only (for expansions valves and filters)



Cod. 01.000.213

€1.670,00

BUS EVOLUTION flushing unit

With trolley, 30lt tank, rapid coupling for nitrogen external tank for the drying, 220V 50Hz, with high pressure pump >8,3 Bar, it is possible to perform an inverted flushing without disconnecting the tubes (to be done on open installations only)

STANDARD ACCESSORIES





Cod. 01.000.206

€120,00

Couple of brackets for the flushing of A/C systems for buses



Cod. 01.000.54

€18,00

Flushing liquid for A/C,1 lt, non-flammable



Cod. 01.000.91

€136,00

Flushing liquid for A/C,10 lt, non-flammable

Cod. 01.000.311

€245,00

NITROGEN KIT FOR A/C STATIONS SPIN

Leak-seeking kit with the N2H2 950 ml cylinder, not refillable, pressure reducer up to 20 bar , double scale pressure gauge with hose and tap, $\frac{1}{4}$ SAE FF 80cm tube, "T" adapter, R134a and HF01234yf LP adapters



Cod. 01.000.203M

€259,00

MULTI REFRIGERANT

N2-H2 Electronic Leak Detector (CFC, HCFC, HFO1234YF, R134A, N2-H2)



Cod. 01.000.225

€600,00

LEAK DETECTION KIT FOR A/C R134A AND R1234YF SYSTEMS

and refrigeration systems with a N2-H2 mix (95%/5%) and electronic leak detector



Cod. 01.090.08

€349,00

PRESSURIZATION SYSTEMS KIT WITH NITROGEN-HYDROGEN N2-H2

Same as cod. 01.000.225, but without the leak detector for hydrogen H2



Cod. 01.090.07

€37,²⁰

0,950 It Nitrogen-Hydrogen N2-H2 Cylinder (95%/5%). Not rechargeable



Cod. 01.090.13

€68,00

2 It Nitrogen-Hydrogen N2-H2 Cylinder (95%/5%), 110 bars. Not rechargeable.

Cod. 01.090.16

€515,00

10 It Refillable Nitrogen-Hydrogen N2-H2 Cylinder (95%/5%), 200 bars



SDIN AUTOMOTIVE

Automatic Device with Printer for Washing of A/C and HVAC Systems

- EASY FLUSH PRO automatically performs several recirculating washing steps (direct and reverse) with final recovery and drying
- 5,5 lt/min flow pump, 20lt tank
- A: Interactive multi-language software. Available languages: IT/EN/HR/CZ/DK/D/F/PL/PT/RO/RU/SK/SL/ES/SW/HU
- · Quality control of the washing product through a glass flow meter
- Final data printing
- · Reusable sintered filter
- · Rear connection to dried compressed air or nitrogen (Max 5bar inlet)
- · 230V AC power supply
- Dimensions: 59x46,5x100 cm, Weight: 45Kg
- A: 10 Lt Alpha Flush (washing liquid) included (for orders: code 01.000.251. Alpha Flush, 10 lt, € 122,00)
- B: Selection of included adapters (for A/C and refrigeration systems

STANDARD ACCESSORIES

Cod. 01.000.251

10 Lt Alpha Flush (washing liquid)

€122,00







OPTIONAL

Cod. 01.000.188

Kit Nitrogen-Hydrogen N₂H₂ Cylinder (95%/5%) 950cc, with pressure reducer

€190,00

Easy Flush Pro

PER IMPIANTI A/C

EASY FLUSH PRO Cod. 01.000.250

€2.500,00



€1.230,⁰⁰

EASY FLUSH Cod. 01.000.171S





MADE IN ITALY

TECHNICAL FEATURES

- · Flushing liquid tank, 20 lt
- Coupling for external nitrogen bottle
- · Flexible hoses, 3 mt
- Wheeled
- Voltage: 230 V 50/60 Hz
- Dimensions: 300x375x680 mm
- Weight: 19 kg

OPTIONAL

Cod. 01.000.91

€136,00

A/C Flushing liquid for Easy Flush (01.000.171S),10 lt



• UU • UU • UU • UU



Standard accessories:

- A: 1/4 sae, 3/8 sae, 1/2 sae couplings
- B: Kit of clamps and cone adapters for connection on hoses

STANDARD ACCESSORIES

- . C: New sintered reusable filter
- · D: Flow meter

DUAL GAS

RECOVERY UNIT R134a/R1234yf



Cod. 01.017.08

€2.750,00

- 300gr/1 (liquid phase) recovery compressor
- Graphic 4.7" electronic board and software in 27 languages
- Electronic scale with 80kgs capacity loading cell
- · LP/HP taps on the panel
- 3mt 1/4 SAE service hoses
- · R134a rapid couplings pair
- Safety/incondensable gases discharge valve (on the panel)
- · Inlet pressure digital reading on the display
- Automatic used oil discharge at the end of recovery, on a 250cc container
- 0-25bar pressure gauge for cylinder
- Internal dehydrating filter with alarm upon reaching the work capacity (shown on the display)
- · Automatic separator for compressor oil
- Possibility to perform a reset in case of internal cylinder replacement
- Automatic alarm on the display in case of cylinder too full (>80% of capacity)
- 12kg empty stock bottle for R134a
- Dimensions: 106,5x55x45cm
- Weight: 45kgs (without cylinders)







MADE IN ITALY

<u> 31.1CR</u>

31.1CR Cod. 01.017.01

€1.495,00

Multigas recovery unit for R12/R134a and main gases for mobile refrigeration

- 400gr/min liquid phase
- LP/HP R134a couplings included







Cod. 01.000.266

12 kg empty R134a bottle for refrigerant storage

€98,00



2 REF SCANNER



R134a / R1234YF stand alone gas analyzer

R134a and R1234yf Analyzer with touch screen Cod. 01.000.331

€3.250,00



TECHNICAL FEATURES

- 4,7" touch screen display with multilingual software
- · WiFi/Bluetooth
- Dual power supply (12V DC 100 / 240V)
- · Printer included (A)
- · Internal chamber flushing pump
- Purity standards both according to VDA regulations (ok not ok >95%) and with percentage of R134a or HF01234yf gas and contaminants

STANDARD ACCESSORIES:

- LP couplings for R134a and HF01234yf with transparent hoses (B)
- 12V DC battery power supply (C)
- 100/240V 50/60Hz power supply (**D**)
- · Drawer for accessories

MADE IN ITALY



ĘĄ.	TEST REPOR	RT GAS OK	
ANALYZER	R134a	100 %	
	HF01234YF	0 %	<u>_</u>
	R22	0 %	HON
	HC	0 %	
	OTHERS	0 %	7
		ANA	LYZER







STANDARD ACCESSORIES



Spare part: \mathbf{O}_2 sensor for 2 REF SCANNER analyzer

Cod. 01.000.262.R3

Price on request

R134a and R1234yf Analyzer

Cod. 01.000.290

€3.090,00

TECHNICAL FEATURES

- · 3.5" graphic interface with multilingual software
- Dual power supply (12V DC 100 / 240V)
- · Printer included (A)
- · Internal chamber flushing pump
- Purity standards both according to VDA regulations (ok not ok >95%) and with percentage of R134a or HF01234yf gas and contaminants

STANDARD ACCESSORIES:

- LP couplings for R134a and HF01234yf with transparent hoses (B)
- 12V DC battery power supply (C)
- 100/240V 50/60Hz power supply (**D**)



DUAL GAS ANALYZER





HF01234yf refrigerant analyzer module for: BREEZE ADVANCE/CLEVER MIURA

Cod. 01.000.216

€2.143,00

Cod. 01.000.205 (for CLEVER ADVANCE)

€2.300,00

- Measurement according to the SAE J2912 standard (% HFO and other gases present, R134a, R22, HC, air) and according to the VDA standard (purity \geq 95% ok / not ok)
- Accuracy ± 1%
- Original "Neutronics" module with the aspiration pump and transparent hoses with HFO1234yf LP adapter included
- 4.7 "graphic display with icons and multilingual messages by the ADVANCE series A/C stations SPIN
- · Possibility of printing the report (in versions with printer)
- · According to SAE/VDA







R1234yf + R134a refrigerant analyzer module for A/C stations:

BREEZE DUAL X4
BREEZE ADVANCE DUAL

Cod. 01.000.263

€2.485,00







Spare part: O_2 sensor for 01.000.216 and 01.000.263 analyzers

Cod. 01.000.262.R3

Price on request

OILS AND ADDITIVES



Cod. 01.000.39

€27,00

21CR (RL 100) POE 100 Oil, 1 lt



Cod. 01.000.252

€30,00

PAG PREMIUM

PAG PREMIUM Oil, 1 lt, for R134a/HFO1234yf a/c systems



Cod. 01.000.253

€35,00

PAG PREMIUM + ADDITIVE PAG PREMIUM 0il with ADDITIVE, 1 lt, for R134a/HF01234yf a/c systems



Cod. 01.000.254

€32,00

ADDITIVE

Universal additive, 250 ml, for R134a/HF01234yf a/c systems



Cod. 01.000.255

€32,80

ADDITIV

Kit **12 syringes**, 7.5 ml with the **universal additive** + 2 adapters (R134a / HF01234yf)



Cod. 01.000.37

€12,00

AV 68R

Vacuum pump oil, 0,5 lt



Cod. 01.000.242

€39,00

COOL-SHOT ULTRA

Performance enhancer for air conditioning and refrigeration systems



Cod. 01.000.241

€42,00

EXTREME ULTRA

High performance innovative leak stop for vehicles A/C system

HYBRID



Cod. 01.000.125

€41,⁵⁰

21CR P0E100

Oil for HYBRID compressors, 1lt



Cod. 01.000.124

€42,00

ADDITIVE

U/V leak detector dye for A/C systems for **HYBRID** vehicles, 350 ml, solvent free



Cod. 01.000.127

€55,⁰⁰

ADDITIVI

U/V leak detector dye for A/C systems for **HYBRID** vehicles, 12 x 7,5 ml, with adapter, solvent free



Cod. 01.000.167

Price on request

Refrigerant **R134a** (refillable **12 kg** bottles) according to the availability



Cod. 01.000.207

€7,²⁰

High pressure adapter for the rechargeable R134a bottle



Cod. 01.000.01 Art. 7CR

€6,00

Adapter for freon bottles 1/4 SAE to connect the station to the **R134a** bottle



Cod. 01.000.187

Price on request

Refrigerant **HF01234yf** in refillable **5 kg** bottle, rapid coupling included, according to the availability



Cod. 01.000.208

€15,00

High pressure adapter for the rechargeable R1234yf bottle



Cod. 05.073.24T

€32,²⁰

U/V flashlight + goggles, 3x1,5V batteries included



Cod. 05.073.25T

€60,00

Rechargeable U/V lamp & googles

- Battery Li-ion 3,7V 2200mAh
- Insulation IP65
- Complete with AC battery charger and cigarette lighter plug 100/240 V AC
- Funcions: 100% 50% SOS OFF





Cod. 01.000.267

€61,00

A/C SERVICE KIT

Annual maintenance kit for spin a/c stations (excl. Astrabus):

- 0,5lt vacuum pump oil
- Filter
- 10 gaskets for a/c service hoses



Cod. 01.000.07

€8,00

Gaskets kit for a/c service hoses



Cod. 01.000.49 Art. 49CR

€150,00

Kit of valves and spare parts for R134 A/C systems, multi-brand



Cod. 01.000.136 Art. 47.4CR

€96,00

Special o-rings kit (double o-rings)



Cod. 01.000.15

€30,00

Kit o-rings 120pcs mixed



Cod. 01.000.94

€45,00

Hose release kit for GM/Audi VW a/c systems, 4 pcs



Cod. 01.000.95

€48,00

Hose release kit for Toyota a/c systems (A+B+C)



Cod. 01.000.17 Art. 17.1CR

€39,50

Flexible hose with valve and 1/4 SAE couplings and tap. Length = 3 mt, (specify the colour!)



Cod. 01.000.19 Art. 17CR

€32.⁵⁰

Flexible hose with 1/4 SAE couplings. Length = 3 mt, (specify the colour!)

Couple of LP+HP quick couplings for R134a, with taps



Cod. 01.000.08 Made in EU

€78,00



Cod. 01.000.08IMP Imported

€41,00

Couple of LP+HP quick couplings for R1234yf, with taps



Cod. 01.000.168 Made in EU

€93.00



Cod. 01.000.168IMP Imported

€49,00



Cod. 01.000.197

€84.00

Couple of high-pressure rapid couplings for BMW5 Ford CMax, Volvo C30 cars



Cod. 01.000.319

€15,⁵⁰

Adapters for washing of internal and external hoses for R134a A/C stations



Adapters for washing of internal and external hoses for R1234vf A/C stations









Cod. 02.023.65

MADE IN ITALY







ATF S-DRIVE 5000 SW

Cod. 02.023.53

MADE IN ITALY





ATF S-DRIVE 4500 SW

Cod. 02.023.90

MADE IN ITALY





ATF START SW

Cod. 02.023.60

MADE IN ITALY





ATF RÈMIN SW

Cod. 02.023.57

MADE IN ITALY



TEQUINION E	FATURE	X-DRIVE	S-DRIVE 4500 SW	S-DRIVE 5000 SW	ATF START SW	ATF RÈMIN SW
TECHNICAL F	lor touch display 5"	cod. 02.023.65 Tablet 8" 4G Wi-Fi	cod. 02.023.90 ✓ 5"	cod. 02.023.53 ✓ 5"	cod. 02.023.60	cod. 02.023.57
Monochromatic gra		Tablet o 40 WI-FI	v 5	v 5	<u>-</u> ✓	-
	th icons easy to use	<u>-</u> ✓	<u>-</u> ✓	<u>-</u> ✓	√	-
		√	√	√	√	-
ľ	Multilingual software	1	1	2	1	1
Oil Magaurament	Pump : 2 electronic scales	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	∠ ✓	· · · · · · · · · · · · · · · · · · ·	visual
		v	∨	∨	∨	visuai ✓
Gearbox's outlet oil pre		∨	•	∨	V	v
AWS function: Autom	ssure measurement		-		-	-
	weight correction	√	✓	✓	manual	-
Automatic Warm-Up the automatic cycle upo	function (starting of on reaching the min. optimal temperature)	✓	✓	✓	-	-
Washing of the ne	ew oil suction circuit	✓	✓	✓	-	-
Measurement of the w	aste oil temperature	✓	✓	✓	✓	-
	Dipstick kit	-	-	✓	-	optional
Automa	tic additive injection	✓	✓	✓	guided manual	guided manual
Possibility to	operate in automatic or manual mode	✓	✓	✓	semi-automatic	manual
	n regulator (built-in)	✓	-	-	-	-
	guide for the service	✓	-	-	-	-
Dual 12V DC and 220 with low battery alarm a		✓	-	-	-	-
Software and databas	e updatable via USB	WiFi	✓	✓	-	-
FI	owmeters (old/new)	✓ backlight	✓ backlight	✓ backlight	transparent hoses, 3 mt	✓
New	and waste oil tanks	2 x 20lt	2 x 20lt	2 x 30lt	2 x 20lt	2x20lt
New sintered reusal	le filter with magnet	✓ 2 filters	✓ 2 filters	✓ 2 filters	✓ 2 filters	✓ 2 filters
	couplings and hoses and Asiatic vehicles	✓	✓	✓	✓	V
	Printer	✓	Optional	✓	Optional	-
(subscrip	Kit SmartPack otion for 12 months)	✓	✓	✓	✓	✓
	r steering oil change	-	✓	✓	-	-
Integrated database number of ratios, gearb oil code; the connection oil type/brand can be in	ox type, oil quantity, n to be used and the	√	√	✓	-	-
Oil	flow hose inversion	Automatic (internal)	Built-In	Built-In	Built-In	Built-In
	Dimensions, mm	620x520x1210	360x440x1120	610x440x1120	620x510x1000	470x420x1020
	Weight	75 kg	45 kg	45 kg	55 kg	50 kg

STANDARD ACCESSORIES



NOTE:

SMART PACK is provided free of charge with the purchase of an ATF SPIN and is valid for 12 months from the first activation. The renewal of the paid service is reserved for customers who have purchased an ATF SPIN.







1								
Cod. 02.0 2 VOLV	22.52/new 0 V50	cod. 02.022.33/new JAP/MB/LANCIA	cod. 02.022.30/new JAP./BMW	cod. 02.022.31/new JAP/GM	cod. 02.022.32/new JAP/GM	cod. 02.022 JAP:/ALFA		cod. 02.022.34/new JAP/VOLVO
	© 8					-		
Cod. 02.022.21/new DSG	Cod. 02.022.11/new AISIN	cod. 02.022.79/new JAP./MB/HUMMER/JEEP	cod. 02.022.84/new JAP:/M14X1,5	cod. 02.022.37/new JAP/CITROEN/LANCIA	cod. 02.022.81/new JAP:/1/8G	cod. 02.022 BMW/MERCE		cod. 02.022.80/new JAP/RUBBER HOSE FITTING
T/2				BB.				
cod. 02.022.59/new BMW 8 MARCE/8 GEARS	cod. 02.022.98/new BMW 8 HP ZF	cod. 02.022.07/.78/.45/ new BMW 2010	cod. 02.022.09/new BMW 3 SERIES	cod. 02.022.18/new OPEL INSIGNA	cod. 02.022.63/new VW TIGUAN/PORSCHE 911	cod. 02.022 AUDI Q		cod. 02.022.99/new FIAT 500 X ZF
	Tool for draining and top up of oil in automatic gearboxes			The state of the s	Į.			A Part of the second
cod. 02.022.85/new	cod. 05.090.82		Hoses for general application	ons		Hoses for gener	al applications	3
	MERCEDES BENZ 9G - TRONIC	cod. 02.022.25/new (Ø 8) x 2 cod. 0		d. 02.022.26/new (ø 10)	cod. 02.022.27/new (ø 12)		cod. C	02.022.28/new (ø 14)



ATF X-Drive Cod. 02.023.65

€5.950,00

Oil Exchanger for Automatic Transmissions with the removable 8" Tablet for the remote control of functions (Bluetooth)

- 8" 4G Wi-Fi Tablet
- . Direct consultation of the database online (by 4G or Wi-Fi)
- · Remote control of functions and monitoring of ongoing operations via the ATF's removable tablet
- · Guided information for the user
- · Integrated database
- · Automatic oil flow recognition and inversion (electronically)
- Input flow reduction regulator (built-in)
- · Integrated diagnosis with messages and related guide for the service
- · Improved procedure for replacing new oil tank (other tanks on request)
- · Guided functions for manual procedure
- · Funzioni guidate for radiator washing procedure and filter replacement
- Specific procedure for DSG
- Dual 12V DC and 220V AC power supply with low battery alarm and automatic power source recognition
- · Printer included
- · Direct access to waste oil for pan emptying
- · Kit of fittings and hoses for European and Asian cars



MADE IN ITALY



COMING SOON

Version with Tablet

Available from January 2023

















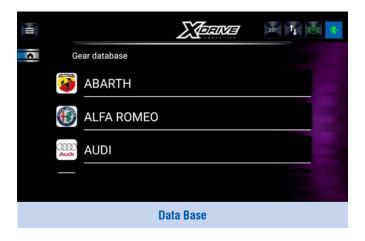



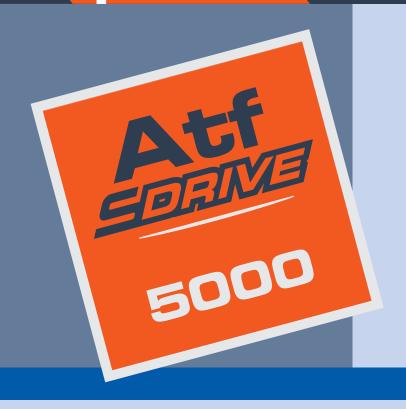



Oil Exchanger for Automatic Transmissions

- A: 5" color touch display
- A: Gearbox outlet oil pressure measurement
- A: ATF's outlet oil pressure measurement
- B: Multilingual software
- C: AWS function: Automatic new oil Weight Set
- D: Funzione warm-up automatico (avvio del ciclo automatico al raggiungimento della temperatura minima ottimale)
- Integrated oil flow inversion system (NEW)
- E: Washing of the new oil suction circuit
- F: Dipstick kit
- G: Automatic additive injection
- H: Possibility to operate in automatic or manual mode
- I: Software and database updatable via USB
- J: Flowmeters with backlight (old/new)
- K: New and waste oil tanks
- L: 2 new sintered reusable filters with magnet



- M: Kit of couplings and hoses for European and Asiatic vehicles included

The pictures have merely explanatory purposes and can be changed with no warning

- 0: SmartPack (12 months of free access to the online Database)
- P: Software for power steering oil change
- Q: Integrated database with brand, version, number of ratios, gearbox type, oil quantity, oil code
- WiFi module for data transmission / reception kit 01.000.328 on request*

SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



€220,00

*to be ordered at the same time as the ATF station

ATF S-Drive 5000 SW Cod. 02.023.53

€ 5.560,00



MADE IN ITALY

S-DRIVE 5000 SW











































Oil Exchanger for Automatic Transmissions

- A: Color touch display 5'
- A: Gearbox outlet oil pressure measurement
- B: Multilingual software
- C: AWS function: Automatic new oil Weight Set
- D: Funzione warm-up automatico (avvio del ciclo automatico al raggiungimento della temperatura minima ottimale)
- Integrated oil flow inversion system (NEW!)



- · E: Washing of the new oil suction circuit
- F: 2 new sintered reusable filters with magnet (NEW!)



- G: Automatic additive injection
- H: Possibility to operate in automatic or manual mode
- I: Software and database updatable via USB
- J: Flowmeters with backlight (old/new)
- K: New and waste oil tanks
- L: Kit of couplings and hoses for European and Asiatic vehicles included
- M: SmartPack (12 months of free access to the online Database)
- N: Software for power steering oil change
- 0: Integrated database with brand, version, number of ratios, gearbox type, oil quantity, oil code
- WiFi module for data transmission / reception kit 01.000.328 on request*

SPIN CONNECT 4.0

Built-in WiFi module + SD Card Cod. 01.000.328*



€220,00

*to be ordered at the same time as the ATF station

ATF S-Drive 4500 SW Cod. 02.023.90

€ 4.560,00



MADE IN ITALY

The pictures have merely explanatory purposes and can be changed with no warning



S-DRIVE 4500 SW





Automatic Weight Set <


1/2





























Semi-automatic Oil Exchanger for Automatic Transmissions

- A: Graphic display 240x64
- A: Control keyboard with only 4 buttons
- A: User-friendly software with icons
- Intuitive software that adapts to different operation mode of the workshop
- B: Multilingual software (22 languages)
- . A: Measurement of the return pressure
- C: Selection of the oil specific weight (kg/lt)
- 2 electronic scales
- 1 pump, 220V50Hz (110V60Hz on request)
- · Measurement of the oil temperature
- D: Possibility to operate in manual or full automatic mode
- E: Protection against overpressure with "automatic recirculation" at the beginning or end of charge
- F: Automatic length compensation of the hoses
- ullet **G**: Possibility to update the software
- H: Manual additive injection
- I: Automatic hose inversion
- J: Transparent hoses for the oil flow control
- K: Case of couplings and hoses for European and Asiatic vehicles
- L: Removable new/old oil tanks, capacity 20lt
- M: 2 sintered magnetic filters (reusable)



- N: Optional printer
- 0: SmartPack (12 months of free access to the online Database)

ATF START SW Cod. 02.023.60

€3.900,00



MADE IN ITALY


ATF START SW
































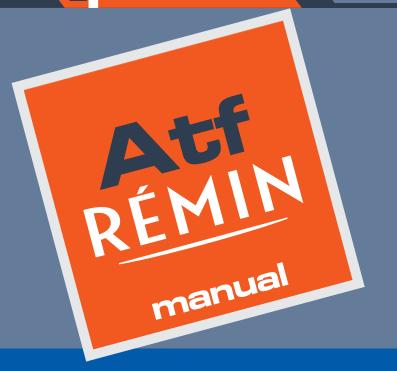

Manual Oil Exchanger for Automatic Transmissions

- A: Control panel with used oil pressure gauge, taps/phase switches and flowmeters
- B: Kit of couplings and hoses for European and Asiatic vehicles (standard included)
- C: SmartPack (12 months of free access to the online Database)
- D: 500ml additive injector with protection against operational errors
- E: Automatic hose inversion (NEW!)
- F: 20 liter removable oil containers for new/
- used oil
- G: 2 sintered magnetic filters (reusable)
- H: Magnetic litre-counters: Useful for visual control of the levels (used oil, new oil)
- I: Facilitated use of the appliance






ATF RÈMIN SW Cod. 02.023.57


€2.800,00







ATF RÈMIN SW

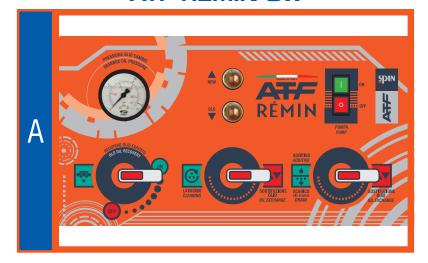





















STANDARD COUPLINGS, INCLUDED IN THE FOLLOWING MODELS:

ATF XDRIVE • ATF 5000 • ATF 4500 • ATF START • ATF REMIN









Cod. 02.022.11/new AISIN (Fiat Croma, Lancia Thesis, Renault Espace, Citroen C5/C3



Cod. 02.022.21/new DSG



Cod. 02.022.52/new VOLVO V50




cod. 02.022.98/new

DIPSTICK

cod. 02.022.85/new



Tool for draining and top up of oil in automatic gearboxes cod. **05.090.82**



BMW 8 HP ZF





MERCEDES BENZ 9G - TRONIC



cod. 02.022.30/new JAP./MB/LANCIA JAP./BMW



cod. 02.022.31/new JAP./GM



cod. 02.022.32/new JAP./GM



cod. 02.022.29/new

JAP./ALFA ROMEO

cod. 02.022.34/new JAP./VOLVO



cod. 02.022.84/new









cod. 02.022.37/new JAP./CITROEN/LANCIA



cod. 02.022.81/new JAP./1/8G



cod. 02.022.44/new

cod. **02.022.80/new** JAP/RUBBER HOSE FITTING

cod. 02.022.07/.78/.45/new BMW 2010



cod. 02.022.09/new BMW 3 SERIES



cod. 02.022.18/new **OPEL INSIGNA**



cod. 02.022.63/new VW TIGUAN/PORSCHE 911



cod. 02.022.13/new AUDI Q5/Q7



cod. 02.022.99/new FIAT 500 X ZF



cod. 02.022.25/new (Ø 8) x 2

Hoses for general applications



cod. 02.022.26/new (Ø 10)



cod. **02.022.27/new** (Ø 12)



cod. 02.022.28/new (ø 14)

<u>SMART PACK ATF</u>

SMART PACK ATF

Cod. 02.022.110

€200,00

ONLINE DATA BASE

with technical information on automatic transmissions (diagrams, photos, location of fittings, etc.)

NOTE:

SMART PACK is provided free of charge with the purchase of an ATF SPIN and is valid for 12 months from the first activation. The renewal of the paid service is reserved for customers who have purchased an ATF SPIN.



<u>Additives ATF</u>



Cod. 02.000.51

ATF flushing addtive, 350 ml

€12,00



Cod. 02.000.67

ATF flushing addtive, 5 lt

€110,⁰⁰

OPTIONAL ACCESSORIES



Cod. 02.000.62

Kit for USA/Japan vehilcles (Ford, Cadillac, Toyota, Nissan, Chrysler Jeep, GM, Dodge, Honda, Chevrolet, Chevy Duramax)

€505,00



Cod. 02.022.66

Oil level refiller

€ 54,⁰⁰



Kit 2 oil level dipstick Mercedes A-Class & C-Class



€55,00



Cod. 05.088.21


Service trolley for ATF accessories

€84,00



Tool for draining and top up of oil in automatic gearboxes of Mercedes

€32,00





Optional ATF adapters

	02.022.21/new	#Ox	DSG	€96,00	02.022.93/new	20	Audi 4/6 Avant >2012, cambio 4G5 su scambiatore	€ 92 , ⁰⁰
	02.022.11/new		AISIN (Fiat Croma, Lancia Thesis, Renault Espace, Citroen C5/C3)	€64,00	02.022.94/new	T T	Mercedes Benz, cambio 722.9	€ 82 ,ºº
	02.022.52/new		Volvo V50	€46, ⁰⁰	02.022.95/new	1053	TF80 MULTI (Volvo, Alfa Romeo, Cadillac, Ford, Land Rover)	€80,00
	02.022.59/new		BMW 8 gears	€ 92 ,ºº	02.022.97/new		Mercedes Classe A/B, cambio DCT	€ 78 ,ºº
	02.022.98/new		BMW 8 marce ZF	€ 79 ,ºº	02.022.100	00	Water/fluid exchanger on Toyota Avensis K311, to be used with rubber hose Ø8	€ 75 , ⁵⁰
	02.022.99/new		FIAT 500X, ZF gearbox	€ 15 , ⁶⁰	02.022.101	0	Water/fluid exchanger on Toyota Corolla , to be used with rubber hose Ø8	€72 ,⁴0
	02.022.61/new		Powershift (Volvo - Ford Focus)	€ 82 , ⁰⁰	02.022.102	0	Water/fluid exchanger on Mazda CX-5 (6 AT) to be used with rubber hose Ø8	€72 ,⁴0
	02.022.62/new	F	Mercedes CLK	€60,00	02.022.104		Water/fluid exchanger on Nissan CVT (JF011E/RE0F10A)	€75,00
	02.022.65/new		BMW 330D 180Hp	€60,00	02.022.105		Water/fluid exchanger on Nissan 6CVT	€75,00
o walling	02.022.72/new		Jatco for Nissan/Renault/Jeep/ Mitsubishi	€ 75 , ⁰⁰	02.022.107/new		Maserati	€89,00
i pe cilangea with i	02.022.73/new		Renault-Nissan<2003, DPO gearboxes	€ 70 , ⁰⁰	02.022.108		Citroen C4/C5 PICASSO	€89,00
y purposes and ear	02.022.74/new	E	Audi A8	€38,00	02.022.109/new		Renault Espace Application: RE0F06A	€78,00
includy capitaliated	02.022.86/new		Volvo XC90	€60,00	02.022.116		LAND ROVER Application: 7F09HP	€130, ⁰⁰
illo piotalos ilave	02.022.88/new		Porsche Cayenne / VW Touareg / Audi Q8	€66,00	02.022.117	180	PEUGEOT 3008	€115, ⁰⁰
ille pictules liave illerely capia			Porsche Cayenne /	,			Application: 7F09HP	



Optional ATF adapters

02.022.120	all a	BMW/Mini/Volvo Application: AWF8F45 (TG-	€86,00	02.022.147/new	A CONTRACTOR	PSA	€97,00
02.022.120		81LS)	C 00,	02.022.147/116W		100	CJI,
02.022.121/new		Audi SQ5 2013	€17,00	02.022.148/new	(O)	Volvo 2	€80,00
02.022.122/new		Range Rover 4.2	€97,00	02.022.149/new	00	BMW/Mini/Suzuki Aisin	€97 , ⁰⁰
02.022.124/new		Volvo V70	€90,00	02.022.150/new	0	BMW MINI mini 2.0L diesel F56 GA8G45AW	€97,00
02.022.126/new	Wille.	Ford Range 3.2/Mazda B-Series	€70 , ⁰⁰	02.022.151/new	00	PSA AMN8 Citroën, DS, Opel, Peugeot 2017	€ 97 , ⁹⁰
02.022.131	0	Škoda	€ 76 , ²⁰	02.022.152/new	00	PSA ATN8 Citroën, DS, Opel, Peugeot 2017	€ 97 , ⁹⁰
02.022.132	0 0	VW Polo	€ 76 , ²⁰	02.022.153/new	a 8	VOLVO TF71	€ 97 , ⁹⁰
02.022.140/new	0 0	Toyota	€ 76 , ²⁰	02.022.154/new	00	AISIN AM6 III 6 marce	€ 97 , ⁹⁰
02.022.141/new	JA Good	Alfa Romeo	€83,00	02.022.155/new		BMW SERIE 5 2998 4WD	€102, ⁹⁰
02.022.142/new		Toyota Lexus	€ 76 , ⁰⁰	02.022.157/new		ATF VAG	€110, ⁰⁰
02.022.143/new		Toyota Lexus 2	€ 76 , ⁰⁰	02.022.158/new		ATF BMW / LAND ROVER / JAGUAR	€65,00
02.022.144/ new	A Second	Volvo	€92 ,00	02.022.159/new		ATF VAG OAW OBK	€ 35 , ⁵⁰
02.022.145/new	A STATE OF THE STA	VAG, Nissan, Suzuki	€97,00	02.022.160/new		ATF BMW MERCEDES JAGUAR	€ 25 , ⁴⁰
02.022.146/ new	A Paris	Nissan, Citroen, Peugeot, Lancia, Alfa	€97,00	02.022.161/new		ATF BMW JAGUAR LAND ROVER	€38,00



AUTOMATIC RADIATOR CLEANING UNIT AND REPLACEMENT OF COOLING LIQUID FOR CARS AND COMMERCIAL VEHICLES UP TO 3.5 TONS


Connection and washing procedure assisted by multilingual software.
 Available languages: IT/EN/HR/CZ/DK/D/F/PL/PT/RO/RU/SK/SL/ES/SW/HU)

EXECUTABLE WORK PHASES:

- Air purging from the WS 4000 unit (specific program)
- Washing of the engine cooling circuit (after inserting the specific additive) through the appropriate injector; the washing is timed but with a duration that can be changed by the operator himself
- Replacement of the coolant with return to the internal tank, the status of the liquid is displayed on the two flowmeters on the panel
- · Emptying of the internal tank with specific program
- Automatic pump bypass during the washing phase but with the possibility of activating the pump for the operator
- Possibility to print the following data (vehicle number plate, VIN, date/time, km)

TECHNICAL FEATURES

- > A: Connection and washing procedure assisted by multilingual software
- > B: Injector for the inserting of the specific additive
- > C: Status of the liquid is displayed on the two flowmeters on the panel
- > **D:** Printer (vehicle number plate, VIN, date/time, km)
- > 200V 50 Hz power supply
- > E: Emptying of the internal tank with specific program
- > Automatic internal liquid heater (3000W)
- > 2 x pressure gauges controlling inlet and outlet pressures
- > 2 x 20lt tanks
- > Maintenance alarm (filter cartridge replacement)
- > F: Kit of accessories and adapters for connection in series to the vehicle cooling system
- > The machine is equipped with 2 tanks "ZEUS" + 2 tanks "URAN"

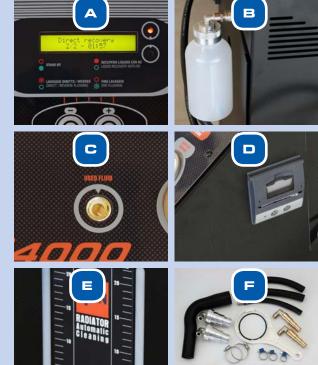

W\$4000 Cod. 02.021.10 € **2.650**,00



MADE IN ITALY



Cod. 02.000.98

€10,00

Decarbonising flushing liquid, 500 ml, suitable for systems up to 8 Lt



Cod. 02.000.99

€8,00

Lubricant with anticorrosion protection, 500 ml, suitable for systems up to 8 Lt

WS 3000 Plus



WS3000 PLUS Cod. 02.021.05

€1.630,00


Radiator cleaning bench. Equipped with a *thermostated heater* to keep the constant temperature while cleaning and replacing coolant liquid



WS3500 Cod. 02.021.11

€2.190,00



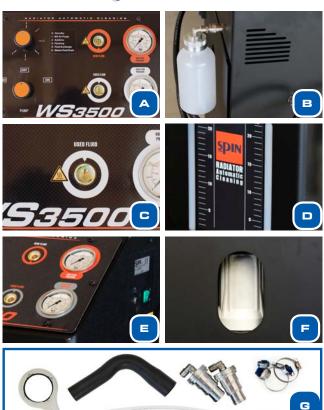



Cod. 02.000.98

€10,00

Decarbonising flushing liquid, 500 ml, suitable for systems up to 8 Lt



Cod. 02.000.99

€8,00

Lubricant with anticorrosion protection, 500 ml, suitable for systems up to 8 Lt

WS3500

RADIATOR CLEANING UNIT

RADIATOR CLEANING UNIT AND REPLACEMENT OF COOLING LIQUID FOR CARS AND COMMERCIAL VEHICLES UP TO 3.5 TONS

TECHNICAL FEATURES

- > A: 2 pressure gauges for inlet and outlet pressures
- > **B:** Injector with rapid coupling on the rear side for "Zeus" decarbonizing additive
- > C: 2 flow indicators on the panel
- > D: 2 taniche da 20 lt
- > E: 200V 50 Hz power supply
- > F: Removable internal textil filter
- > **G**: Kit of included couplings and hoses for the connection to the vehicle cooling system
- > Automatic internal liquid heater (3000W)



ENGINE DECARBONIZATION PETROL / DIESEL / LPG

RESTORE THE PERFORMANCE OF YOUR PETROL / DIESEL / LPG ENGINE

BENEFITS

RETURN TO THE INITIAL PERFORMANCE

FUEL SAVE

INCREASE ENGINE'S POWER

CARBON DEPOSITS REMOVAL FROM:

VALVES

TURB0

SPARK PLUGS

INJECTORS EGR VALVES

FAP OBSTRUCTIONS



	141	Waster, and the same of the sa	
TECHNICAL DATA	Cod. 02.013.13	Cod. 02.013.12	Cod. 02.013.15
Model	OXY MATE	OXY MASTER	OXY MASTER Plus
Intake manifold decarbonisation	_	optional	standard
Power supply	230V 50 Hz	230V 50 Hz	230V 50 Hz
Max HHO Production	90 lt/h <10A 20°	384 lt/h a 20A	384 lt/h a 20A
Tank capacity	4 lt	60 lt	60 lt
Touch Screen Interface	3"	10"	10"
WiFi / Bluetooth standard	✓	✓	✓
Electrolitic cell inox steel Aisi 316	✓	✓	✓
Timer	0-90'	0-180'	0-180'
Manual Cycle with	✓ fixed flow	✓ adjust flow	✓ adjust flow
Automatic Cycle	✓	✓	✓
Concentration rate electrolyte in not distilled water	3%	10%	10%
Safety device			
B 11 "	,	,	,

Red button	✓	✓	✓
Level sensor inside the tank	✓	✓	✓
Automatic switchoff for >20 A	✓	✓	✓
Vibration tachometer	✓	_	_
Tachometer with obd and bluetooth socket	_	✓	✓
Non-return valve on the delivery tube	✓	bubbler	bubbler
Accelerator locking pressor for Oxy Mate / Oxy Master models	optional	optional	optional
Dimensions, cm	38 x 27,5 x 65,5	60 x 60 x 105	60 x 70 x 105
Weight (kg)	29 kg	120 kg	125 kg



Cod. 02.013.13



DETAILS THAT MAKE THE DIFFERENCE:

- Power supply 230V 50Hz (not from vehicle battery)
- · High energy efficiency thanks to the modular system (patented) picture A
- Body in stainless steel (AISI 316L)
- Intuitive 3" touch screen interface
- Vibration sensor for rpm reading (car running)
- Continuous control of the electrolyte density and signaling of the need to fill up the level of the water
- Suitable for Petrol / Diesel / LPG engines up to **3000cc**

Application for data transfer / Android)

· 1kg KOH included









Cod. 02.013.12

€ **7.300**,00





- Power supply 230V 50 Hz (not from vehicle battery)
- High energy efficiency
- Tank-electrolytic cell group in modular aisi 316 L stainless steel
- 10 "Touch interface with intuitive software
- Bluetooth rpm sensor (car running)
- WiFi-Bluetooth connection as standard
- Continuous control of the electrolyte density and signaling of the need to fill up the level of the water
- External bubbler filter (to avoid return of the flame)
- Suitable fo Petrol / Diesel / LPG engines up to **8000cc**
- Application for data transfer / Android)
- 6 kg KOH included



MADE IN ITALY



Cod. 02.013.15

€ 8.650,00


2 IN 1 ENGINE DECARBONIZER (decarbonizer 02.013.12 + intake manifold cleaning kit)





STANDARD ACCESSORIES

- A: Mounting discs
- · B: Nebulizer
- C: 2.5 m hose
- C: Decarbonization liquid, 1 lt





Cod. 02.013.17









PORTABLE DECARBONIZER FOR INTAKE MANIFOLDS

FUNCTION:

- · Decarbonisation of the intake ducts of endothermic engines
- Removal of carbon residues from the walls and suction ducts, without disassembling the parts, speeding up maintenance procedures

BENEFITS:

 Return to initial engine performance Fuel saving Increased engine power

TECHNICAL DATA:

- 5 "touch screen display
- · End of treatment reports and / or buzzer alerts
- 2.4 GHz WiFi connection
- Input voltage: 10-16V DC
- Power: 15W
- Tank: 2 It
- Compact and lightweight (30x28x18cm / 3.7Kg)

STANDARD ACCESSORIES









- A: Power cables with clamps (L = 2.5m)
- . B: Mounting discs
- · C: Nebulizer
- **D**: 2.5m hose
- E: Decarbonization liquid, 1 lt

ACCESSORI A RICHIESTA

Cod. 02.013.16



>Accelerator locking presser for Oxy Mate / Oxy Master models





Cod. 02.013.19

RICHIESTA

>Potassium hydroxide KOH, 1 kg

Cod. 02.013.18 € 33,¹⁰

>Liquid for decarbonisation of intake manifolds, 1lt

Tyre LIFTER



Tyre Lifter 70

Cod. 05.084.27

€2.190,00

BATTERY-POWERED WHEEL LIFTER

The battery-powered TYRE LIFTER 70 is designed to move the wheels of cars and lightweight commercial vehicles conveniently and safely.

It has absolutely unique features in the world of wheel lifters, making for an ease of operation which has no equal in rival products.

In fact there are no support forks on the ground in front of the lifter so the wheel can be easily moved in front of

the assembly point without being obstructed. The wheel

lifter has an effective load capacity of 70 kg.

Lifting precision means it can stop exactly where the mechanic needs to fit the wheel, like having a strong, meticulous colleague to help you.

TECHNICAL FEATURES

- · Max load lifter: 70 kg
- · Max. operating height: 1600 mm
- Battery: 24 V
- Height: 1700 mm
- Width: 950 mm
- Weight: kg 98
- Note: battery charger included



This lifter is without any support forks on the ground in the front. Thanks to this characteristic, it can be used with all kind of lifts, even those with a base and with parts fixed to the ground.

Suggested for:

- · Cars and vans car dealers
- · Tyre shops specialists
- Quick service workshops

Long forks for Tyre Lift 70

Cod. 05.084.36

€145,00



BANCHETTO SMART


AUTOMATIC TEST BENCH FOR 12V / 24V ALTERNATORS

BANCHETTO SMART 12/24V

Cod. 02.004.20

€5.670,00









BANCHETTO SMART

TOMATIC TEST BENCH FOR 12V / 24V ALTERNATORS

THE DETAILS THAT MAKE THE DIFFERENCE:

- · Internal batteries not required
- Internal load rheostat 0-50 A (12V) e 0-25 A (24V)
- . A: Color Touch Screen Display
- B: Database which allows to research the alternator by code and by type of protocol
- C: Graphic indication of the connectors and wires to be connected
- Setting function: possibility to adjust date/time and to perform manual/automatic tests
- · Print report
- Oscilloscope function and trace printing
- Database upgradeable from USB port
- D: Bluetooth graphic printer included
- E: Kit of 9 OEM connectors included

TECHNICAL FEATURES:

- Power supply: 230V 50Hz
- · Alternator test: 12V and 24V
- · Motor power: 1.5 KW
- Adjustable load power (0-50A) to 12 V (0-25A) to 24V
- Motor speed range 0-3000 rpm
- · Belt drive (V and Poly-V)
- Testable regulator protocols

L/FR, SIG, RLO, RVC, C KOREA, P-D COM, LIN-BSS), C Japan

- Measurements on the display:
 - Voltage
 - AC
 - DCSpeed
- For controllers with "com" socket:
 - ID
 - Protocol
 - Speed
 - · Regulator voltage type
 - · Errors detected
 - · Ø of the pulley
 - Graphic indication of the connection with the test cable
- Dimensions: 570x490x450mm
- Weight: 42 kg




SELE CLEAR SEARCH	CT BY N SERIAL NUMBER 112142					
112142	1079312	FORD				
112142	1126051	FORD				
112142	1144182	FORD				
112142	1151214	FORD				
112142	1215766	FORD				
112142	1219711	FORD				
STATUS - CO	OMPLETE. FOUND	27				
	MANUFACTURE					
	V AMPERE = 90/ mm Plug= 0 Di					
-						
BACK	KEYBOARD	TEST				

I,DC I,AC	0
AUTO TEST COMPLETE. SELECT PRINT TO VIE	

















Cod. 02.004.02

Price difference for **DIGITAL instruments** for Banchetto "Plus"

€420,00

Cod. 02.004.03

Mechanical brake for starter test on stirrup for Banchetto "Plus"

€1.180,00



Te-Sla Tronic

Cod. 04.036.03

€1.048,⁰⁰





TECHNICAL FEATURES		HETTO	BANCHETTO	BANCHETTO	
		IIOR	PLUS	PROFI	D TRUCK Bancoprova
Model	400V	Inverter EVO	Inverter EVO	Inverter EVO	D Truck EVO
Code	02.012.00	02.012.03	02.004.14	02.004.15	02.005.43
Price list	€2.580 , ⁰⁰	€4.200 , ⁰⁰	€5.900 , ⁰⁰	€8.080 , ⁰⁰	€ 16.270 , ⁰⁰
Lower basement	_	_	✓	✓	✓
Power Supply	400V three-phase	220V one-phase	400V three-phase	400V three-phase	400V three-phase
Motor	2 Hp	3 Нр	3Нр	5,5 Hp	10 Hp
Continuous Speed variation (Inverter)	One-speed motor	✓	✓	√	√
Charging rheostat	200W (14V)	200W (14V)	490W (14V)	600W (14V)	850W (14V)
Analogue Instruments	√	✓	✓	_	_
Digital instruments	_	_	on request	✓	✓
With tester TE-SLA TRONIC (04.036.03) for the latest generation of voltage regulators for alternators	_	~	√	√	√
EXECUTABLE TESTS					
Alternators: 12-24 V	✓	✓	✓	✓	✓
Max. alternator power (W)	1000	1200	1400	2000	3500
Armature test	optional kit 04.036.00	optional kit 04.036.00	optional kit 04.036.00 optional kit 04.036.00		✓
12-24V Electric equipment test	✓	✓	✓	✓	✓
12-24V Starter test (no load)	√	✓	✓	✓	✓
Test of starters with brake	_	_	on request	✓	✓
Diode plate test	_	-	✓	✓	✓
Field & condenser insulation test	-	-	✓	✓	✓
Drawer for accessories and tools	-	-	-	-	✓
Worktop lighting	-	-	-	-	√
Dimensions (cm)	75x75x80	75x75x80	101x46x146	101x46x146	152x78x162
Weight (kg)	50	50	120	160	450









DATI TECNICI	DATI TECNICI		V T		
	MASTERMATE	RED	STAR	BLU .	STAR
Model	PROFI	BASE	PROFI	BASE	PROFI
Code	02.006.04	02.007.04	02.007.09	02.008.02	02.008.04
Price list	€6.990 , ⁰⁰	€4.400 , ⁰⁰	€5.614 , ⁰⁰	€3.236 , ⁰⁰	€4.645 , ⁰⁰
Nr. of injectors on test	6	6	6	4	4
Automatic recognition of the injector type	V	V	V	manual	manual
U/S tank with timer	3 lt	3 lt	3 lt	2 lt a	2 lt
Digital adjustment RPM, time injection (tests programs)	√ 13 programs	√	√ 4 programs	manual (cold mode)	manual (cold mode)
High Pressure pump (up to 11 bars)	V	V	V	V	√
Test on SPI & MPI injectors	V	V	√	√	√
Test and cleaning of LPG injectors	V	V	V	√	V
Service Trolley	V	V	√	optional cod. 05.088.40	√
5411 (cod. 02.000.43) Liquid for hot washing U/S tanks, 5 lt	V	V	√	-	-
WT1 (cod. 02.000.42) Liquid for cold washing U/S tanks, 5 lt	-	-	-	V	V
REM 40 (cod. 02.000.41) Liquid for petrol injector tests, 5 lt	V	V	√	V	✓
Base equipment	V	V	√	V	V
043.6 (cod. 02.000.30) Kit adapters for Honda, Toyota, Hyunday, Mitsubishi	V	-	√	-	✓
043.9 (cod. 02.000.32) Adapter kit for Ford SPI and MPI	V	-	√	-	\checkmark
043.11 (cod. 02.000.33) kit for Citroen, VW, Ford, Bosch monomotronic (Y10) injectors	V	-	√	-	✓
043.20 (cod. 02.000.35) Kit for Nissan injectors	V	-	√	-	V
043.24 (cod. 02.000.49) Kit for GDI-FSI-JTS injectors	V	-	√	-	√
Cod. 02.000.57 Injector holding rail for LPG Landi Renzo	V	-	√	-	√
Cod. 02.000.60 Injector holding rail for BRC	V	-	√	-	√
Cod. 02.000.68 Injector holding rail for LPG	V	-	√	-	√

RED STAR

TEST BENCH & INJECTOR CLEANER



MASTERMATE

TEST BENCH & INJECTOR CLEANER



BLU STAR

TEST BENCH & INJECTOR CLEANER



	OPTIONAL ACCESSORIES	
	Art. 043.6	
02.000.30	Kit adapters for Honda, Toyota, Hyunday, Mitsubishi (included in PROFI Version)	€130, ⁰⁰
02.000.32	Art. 043.9 Adapter kit for Ford SPI and MPI (included in PROFI Version)	€130, ⁰⁰
02.000.33	Art. 043.11 Kit for Citroen Xantia, Peugeot 406, Ford Mon deo, VW Golf e Bosch mono motronic (Y10) (included in PROFI Version)	€155, ⁰⁰
02.000.35	Art. 043.20 Kit adapters for Nissan Primera, Micra, Serena (included in PROFI Version)	€111, ⁰⁰
02.000.49	Art. 043.24 Kit for direct fuel injection systems GDI-FSI) (included in PROFI Version)	€225 , ⁰⁰
02.000.48	Art. 043.23 Kit of cables and stirrup for motorcycle injectors	€90, ⁰⁰
02.000.57	Injector holding rail for LPG Landi Renzo, also for Fiat Panda Natural Power (included in PROFI Version)	€130, ⁰⁰
02.000.60	Injector holding rail for LPG BRC (included in PROFI Version)	€130, ⁰⁰
02.000.59	Injector holding kit for METHANE (Breda Bus), 4 pcs	€188, ⁰⁰
02.000.68	Universal Injector holding rail for LPG (included in PROFI Version)	€113, ⁰⁰
02.000.41	Art. REM 40 Liquid (5 lt) for petrol injector tests	€62, ⁰⁰
02.000.42	Art. WT1 Liquid (5 It) for COLD washing U/S tanks (for BLUE STAR model only!) To be used 100% pure	€103, ⁰⁰
02.000.43	Art. 5411 Liquid (5 lt) for HOT washing U/S tanks (for CK-Export U/S tanks) Max 10% dilution (90% water)	€59 , ⁰⁰

ITROGEN GENERATORS WITH PERMEABLE MEMBRANE SYSTEM FOR INFLATING TYRES OF CARS, VANS AND BUSES

- Minimum purity: 95%
- · Built-in, oil separating and active carbon filters
- · Automatic condensation overflow
- · A: Air-nitrogen switch
- . B: Extra outlet for external tank
- · C: Nitrogen outlet pressure gauge
- . D: Filter blockage check instrument
- E: Inflating/deflating Michelin gun with Venturi meter and 8 mt spiral hose
- F: 20 caps for tyres inflated with nitrogen

OPTIONAL ACCESSORIES

Cod. 03.000.14

Kit of caps for tyres inflated with nitrogen, 100 pcs

€17,00

Cod. 03.006.01

Kit of spare cartridges for Nitropoint 10 / Nitropoint 20, 3 pcs

€150,00

Cod. 03.006.02

Kit of spare cartridges for Nitropoint 1 / Nitropoint 3, 2 pcs

€96,00

Important: please specify the serial number in the order

NITROPOINT



STANDARD ACCESSORIES



NITROPOINT Line	NITROPOINT 1 Cod. 03.002.02	NITROPOINT 3 Cod. 03.002.04	NITROPOINT 10 Cod. 03.002.06	NITROPOINT 20 Cod. 03.002.22
Price list	€2.530 , ⁰⁰	€3.700 , ⁰⁰	€6.996 , ⁰⁰	€9.328 , ⁰⁰
Flow capacity	1,2 Nm³/h 10 bar (145 PSI)	3,6 Nm³/h 10 bar (145 PSI)	12 Nm³/h 10 bar (181 PSI)	24 Nm³/h 10 bar (181 PSI)
Purity	Purity Min. 95%		Min. 95%	Min. 95%
Dimensions	35 x 20 x 94,5 cm	35 x 20 x 94,5 cm	35 x 20 x 94,5 cm	35 x 20 x 94,5 cm
Weight	35 kg	37 kg	42 kg	45 kg

NITRO@SERVICE

LINE



STANDARD ACCESSORIES







NITROGEN GENERATORS WITH PERMEABLE MEMBRANE SYSTEM FOR INFLATING TYRES OF CARS, VANS AND BUSES

- Minimum purity: 95%
- · Built-in, oil separating and active carbon filters
- · A: Filter blockage check instrument
- · Automatic condensation overflow
- · Air-nitrogen switch
- · Nitrogen outlet pressure gauge
- · Extra outlet for external tank
- 90 It tank included (by Nitro@service 1200 / 3600)
- With trolley: 2 fixed wheels and 2 rotating wheels
- B: Inflating/deflating Michelin gun with Venturi meter and 8 mt spiral hose
- C: 20 caps for tyres inflated with nitrogen

OPTIONAL ACCESSORIES

Cod. 03.000.14

Kit of caps for tyres inflated with nitrogen, 100 pcs

€17,00

Cod. 03.006.01

Kit of spare cartridges for Nitroservice 12000/24000, 3 pcs

€150,00

Cod. 03.006.02

Kit of spare cartridges for Nitroservcie 1200 / 3600, 2 pcs

€96,00

Important: please specify the serial number in the order

NITRO@SERVICE Line	NITRO@SERVICE 1200 Cod. 03.002.40	NITRO@SERVICE 3600 Cod. 03.002.41	NITRO@SERVICE 12000 Cod. 03.002.42	NITRO@SERVICE 24000 Cod. 03.002.43
Price list	€3.100 , ⁰⁰	€4.150 , ⁰⁰	€7.410 , ⁰⁰	€9.740 , ⁰⁰
Flow capacity	1,2 Nm³/h 10 bar (145 PSI)	3,6 Nm³/h 10 bar (145 PSI)	12 Nm³/h 10 bar (181 PSI)	24 Nm³/h 10 bar (181 PSI)
Purity	Min. 95%	Min. 95%	Min. 95%	Min. 95%
Internal tank	90 lt (Nitro@service)	90 lt (Nitro@service)	Can work without external tank	Can work without external tank
Dimensions	60 x 44 x 132 cm	60 x 44 x 132 cm	60 x 44 x 132 cm	60 x 44 x 132 cm
Weight	75 kg	75 kg	65 kg	70 kg

HL 40 LX

High precision electronic headlight tester



€1.830,⁰⁰

AUTOMATIC RECOGNITION OF THE LIGHT

Thanks to latest generation technology, the device is able to recognize automatically the type of the light that is testing ensuring maximum accuracy of the result. The operator no longer has to choose the type of headlight to be tested

INTUITIVE SOFTWARE

We have created a user-friendly SW that, thanks to its graphic icons, leaves the customer no longer doubts.


The headlight gives the result on the status of the headlight automatically (too high / low / left / right or OK) so it is no longer the operator who has to decide if the position of the headlight is correct

ETHERNET CONNECTION

The device can be connected to a PC to make: Remote control, Sending data to PC, Remote technical service If the device is connected to a WIFI repeater, this can be controlled from the smartphone using the appropriate free application

TECHNICAL FEATURES

- Suitable for LED / Xenon and Halogen lights
- · Automatic recognition of the light type
- Min. operating height: 23 cm
- Max. operating height: 146 cm
- Lens type: OPTICAL GLASS LENS
- High precision internal luxmeter ± 0.01
- 4.3 "color touch screen display
- Laser pointing system
- Mirror visor
- Electronic level
- Available languages 10
- USB/ Ethernet interface
- · PC connection for data storage and print
- · Remote control from PC
- GREEN Laser visor (Optional)
- Rail system (Optional)
- Status lights (Optional)
- Wi-Fi (with Optional accessory)
- Power supply: 2 x 12V batteries
- Weight: 35 Kg








HL30 TRONIC/2 Cod. 03.011.08 $\in 1.038,00$

- Manual adjustment of the correct position for all types of headlight, lower beam, upper beam and fog lights (A)
- Automatic recording of light intensity of all types of headlight (A)
- · Multilingual software (A)
- USB port for connection to PC with forwarding of recorded data and print option via PC (B)
- Records vehicle number plate, name of garage, used inclination and headlight height
- Height of column: 1700 mm
- Standard version with mirror visor and central laser pointer (C)
- Adjustable panel, 0÷4% (D)
- Can be used on both European and American/Japanese headlight types (E)
















HL26 DL1 LX Cod. 03.011.01

€700,00

- Mechanical headlight beam tester
- Digital luxmeter (A)
- · Mirror visor (B)
- Locking clamp and graduate scale with spring inside, L=1700mm
- Fixed base
- Adjustable panel, 0÷4% (C)
- Semi optical lens ø200
- · Central laser pointer (D)
- HAL-LED/XEN Switch (F)

HL26 D LX Cod. 03.011.00

€620,00

As HL26 DL1, but without lens laser











MADE IN ITALY



HL19 D LX Cod. 03.011.05 € **560**,00

- · Mechanical headlight beam tester
- A: Digital luxmeter
- **B**: Mirror visor
- C: Sliding system L=1660mm with locking clamp (no spring inside)
- **D**: Adjustable panel (0 ÷ 4%)
- Semi optical lens ø200
- E: Fixed column
- F: HAL-LED/XEN Switch













MADE IN ITALY

TECHNICAL FEATURES	HL30 TRONIC/2	HL26 DL2 LX	HL26 DL1 LX	HL26 D LX	HL19 D LX			
Code	Cod. 03.011.08	Cod. 03.011.02	Cod. 03.011.01	Cod. 03.011.00	Cod. 03.011.05			
Price List	€1.038 , ⁰⁰	€820 , ⁰⁰	€700 , ⁰⁰	€620 , ⁰⁰	€560 , ⁰⁰			
Digital luxmeter	_	√	√	√	√			
Electronic luxmeter	√	_	_	_	_			
HAL-LED/XEN Switch		√	√	√	√			
USB output for data download	√	_	_	_	_			
Sliding system L=1660mm	_	_	_	_	√			
Sliding system with locking clamp	√	√	√	√	_			
Mirror visor	√	_	√	√	√			
Central laser pointer	√	V	√	_	_			
Upper laser alignment	_	V	_	_	_			
Semi optical lens ø200	√	V	√	√	√			
Adjustable panel (0-4%)	_	$\sqrt{}$	√	V	√			
USA/Jap/EU vehicles panel	√	_	_	_	_			
Multilingual software	√	_	_	_	_			
OPTIONAL ACCESSORIES								

OPTIONAL ACCESSORIES						
Sliding system (3 parts) for volume reduction	€36 , ⁰⁰	V	_	_	_	_
Anti-dust cover	€28 ,00	√	\checkmark	√	√	√
Upper laser alignment (instead of mirror visor)	€ 132 ,00	V	V	V	standard included	√



Brake disc grinding lathe Cod. 02.003.09

€3.990,00

TECHNICAL FEATURES


- Maximum disc thickness: 39mm
- Maximum cutting depth: 0,8mm per cutting edge
- Working height: adjustable from 800 to 1200mm
- Cutting speed: 8.5mm per minute
- RPM: 98rpm
- Max. disc diameter: 350mm

Aligning results:

- Brake disc wobbling: $<20\mu m$
- Irregular thickness: $<20\mu\mathrm{m}$
- Surface roughness: $<1\mu$ m
- Voltage: 220V/50Hz
- Current: 6.8A

The kit includes the lathe for discs 220V 50Hz, the moving unit and 13 accessories to work on European and Asiatic cars and commercial vehicles.







INCLUDED ITEMS						
801000	220V 50Hz Disc lathe	1 pc	803104 H	Brush	1 pc	
802000	220V 50Hz Driving unit	1 pc	803102 I	Hexagonal key M6	1 pc	
803001 A	Universal slide with thread (set)	1 pc	803111 L	Small silencer bank for discs	1 pc	
803002 B	Set of 2 slides	1 pc	803105 M	Oil	1 pc	
803011 C	Extension brackets for 803001	1 pc	803106 N	S-hooks	2 pcs	
803012	Extension brackets for 803002	1 pc	803103	Shims wash	7 pcs	
803017 ⊑	Larger drive adapter	1 pc	02.003.06 P	Special bracket for Opell	1 pc	
803013 F	Bit (three side)	2 pcs	02.003.07 ©	Special bracket for Toyota/Nissan	1 pc	
808001 G	Small mounting plates	1 pc	02.003.08 R	Kit bolts for VW Golf/Ford Focus	1 pc	

<u>BRAKE MATE MK2</u>



BRAKE MATE MK2

Cod. 03.036.35

€1.090,00



MADE IN ITALY

TECHNICAL FEATURES


- 2 pumps: one for the waste liquid recovery and one for the insertion of the new liquid
- Pump capacity: 1 lt/min
- · New fluid tank capacity: 5 It standard
- Space for optional tank up to 25 lt (C)
- · Waste fluid tank capacity: 5 lt
- Compatible liquids: Pre DOT DOT2 DOT3 DOT4 DOT5 DOT5.1 DOT6 DOT6.1 LHM
- · Operating pressure: 0 4 bar
- Delivery hose length: 7.5 m
- Suction hose length: 7.5 m
- The cabinet is equipped with a special compartment for storing the accessories (A)
- Space for the optional box with new caps, cod. 03.036.28 (B)
- Power supply cable length: 3 m
- Power supply: 230V 50-60 Hz
- Dimensions: 67x54xh90 cm
- · Weight: 35 Kg

STANDARD ACCESSORIES

- 5 adapters of various sizes (D)
- · 2 tanks (2 lt) for waste fluid bleeding
- 5 It tank for the extracted waste liquid (F)
- 5 It tank for the new fluid (F)





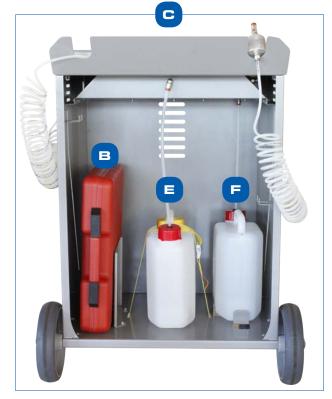

ADAPTER KIT FOR THE BRAKE BLEEDER

Cod. 03.036.28

€ **210**,00



- Suitable for most pressure brake bleeders
- European cap adapter, multi vehicle caps, American adapter (gm), BMW/Audi, Nissan, Mazda & Honda
- Universal adapters and manufacturer specific caps
- Adapters fit 90% of current master cylinder reservoirs

BRAKE FLUID BOILING POINT TESTER 12V DC

Cod. 05.036.04

€ 350,00



- · Power supply: 12V DC from battery
- Measuring range: 0-320 ° C
- TFT color display
- Simple and reliable software for different types of brake fluid (DOT3, DOT4, SUPER DOT4, DOT5, DOT5).



Kit for Toyota

Cod. 03.036.39

€ 62.00





Kit for Toyota Hino

Cod. 03.036.40

62,00 •





HEATING INDUCTORS

Induction heating is a fast and clean method (in absence of open flames) used to heat metals and other conductive materials. The induction heater creates an alternating magnetic field that generates induced currents inside the material. These induced currents generate the heating.

The absence of open flames makes work safer while ensuring safety and cost savings. It allows you to work even near heat-sensitive parts.

The use of open flames is no longer permitted by EU legislation.

With SPIN heating inductors, heat ferrous materials and aluminum quickly and safely: the heating inductors will make your work better and faster!



Disassembling bolts



Warm up ball bearings



Disassembling mufflers




Heating of Lambda Sensor



Disassembly uspension arms



he use of open flames is no longer permitted by EU legislation

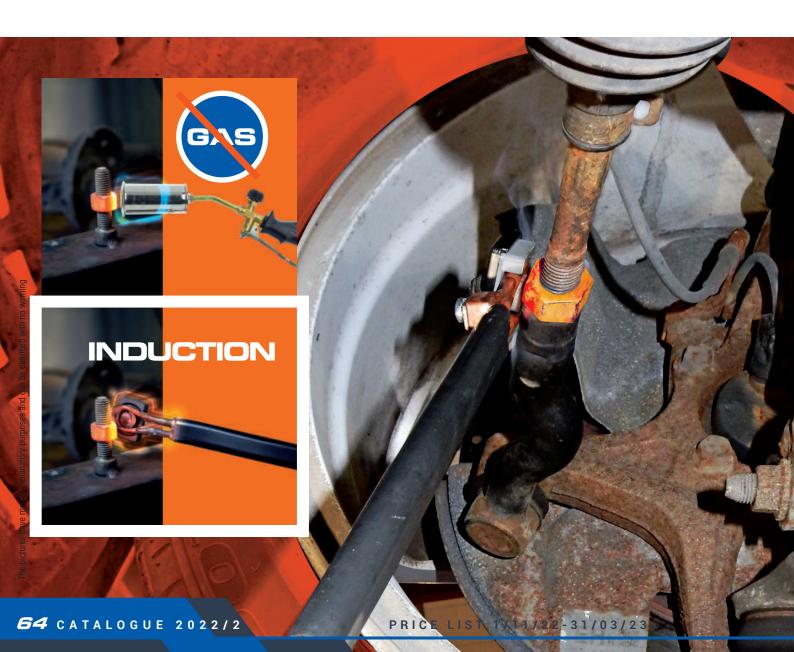



<u>HEATING INDUCTORS</u>

MA	DE	IN	ITA	LY









TECHNICAL FEATURES		,				
Model	Hi 3.7	Hi 5.5	Hi 13	Hi 18		
Code	Cod. 05.066.11	Cod. 05.066.13	Cod. 05.066.27	Cod. 05.066.28		
Price List	€3.630 , ⁰⁰	€ 5.800 , ⁰⁰	€ 9.870 , ⁰⁰	€10.650, ⁰⁰		
Max. power	3.7 Kw 16A	5 Kw 16A	13 Kw 16A	18 Kw 32A		
Power supply	230V single phase	400V 3ph	400V 3ph	400V 3ph		
Frequency range (kHz)	15 ÷ 30 kHz	15 ÷ 30 kHz	15 ÷ 30 kHz	15 ÷ 30 kHz		
Duty cycles	15'	30'	45'	60'		
Inductor cable length	4 mt	4 mt	4 mt	4 mt		
Power supply cable length	9 mt	9 mt	9 mt	9 mt		
Tank capacity	20 lt	20 lt	20 lt	20 lt		
Cooling system	√	√	√	√		
Keyboard	√	V	√	√		
Electrical connection	IEC 60309	IEC 60309	IEC 60309	IEC 60309		
Dimensions, cm	80 x 80 x 115	80 x 80 x 118	80 x 83 x 135	80 x 83 x 135		
Weight (kg)	50 kg	67 kg	120 kg	130 kg		
	APPLICATION					
Car Body Shops	Х	_	_	_		
Tyre Shops	xxx	_	_	_		
Car Mechanics	xxx	xx	_	_		
Agri	xx	xxx	xxx	х		
Trucks/earth moving vehicles	_	х	xxx	xxx		
Maintenance/Industry/Nautic	_	_	xxx	xxx		

OPTIONAL ACCESSORIES


Hi 3.7 / Hi 5.5				
	Cod. 05.066.14 Lateral operating tool	€ 360 , ⁰⁰		
2	Cod. 05.066.15 Vertical operating tool	€360 , ⁰⁰		
	Cod. 05.066.16 Ferrite for lateral operating tool	€42 , ⁰⁰		
De	Cod. 05.066.17 Ferrite for vertical operating tool	€42 , ⁰⁰		

Hi13			Hi18	
	Cod. 05.066.19 Lateral operating tool	€360 , ⁰⁰	Cod. 05.066.28.R1	€545 , ⁰⁰
2	Cod. 05.066.20 Vertical operating tool	€360 , ⁰⁰	Cod. 05.066.28.R2	€545 , ⁰⁰
W	Cod. 05.066.21 Ferrite for lateral operating tool	€ 180 , ⁰⁰	Cod. 05.066.28.R3	€225 ,00
	Cod. 05.066.22 Ferrite for vertical operating tool	€96 , ⁰⁰	Cod. 05.066.28.R4	€138 , ⁰⁰

KOMPACI

KOMPACT 3000 PRO Cod. 03.031.30

€1.460,00

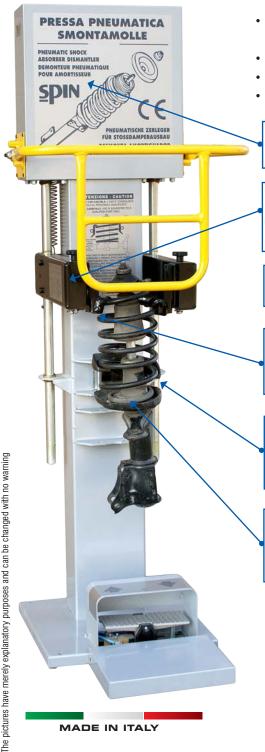

PNEUMATIC SPRING COMPRESSOR

- · 1600 kg at 10 bars;
- 2 pneumatic pistons
- Pistons stroke increased for shock absorbers with fewer coils
- · Interconnected arms for greater safety in use
- Boxtype and ribbed cabinet in sheet steel
- Pneumatic pedal
- Dimensions: 65x60x156cm
- Weight: 70 kg

2 pneumatic pistons

Interconnected arms for greater safety in use

Double swinging hooks

Pistons stroke increased for shock absorbers with fewer

The machine adjusts to the spring, not vice versa

Oscillating flange holder support (+/- 6°) for nonadjustable shock absorbers

STANDARD EQUIPMENT:

A: 3 flanges in spheroidal castiron (Ø 85/125, Ø 125/150, Ø 150/195)

B: Flange-holder oscillating support $(\pm 6^{\circ})$ for non regular shock absorbers

C: Spacer for conical springs

D: vice

E: Pair of oscillating double hooks

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Cod. 03.031.15

€140,00

Kit hooks for small diameter spring (Japanese vehicles, Korean vehicles, Smart, etc)



Cod. 03.031.16

€77,90

Flanges ø240 for suspensions of all-terrain vehicles/suv



Cod. 03.031.17

€275,00

Special flanges for dismantling shockabsorbers Mercedes Classe A and C (2pcs)



Cod. 03.031.18

€140,00

Special flask for dismantling shockabsorbers Porsche Cayenne and VW Tuareg

MADE IN ITALY







A/C Stations

Air Conditioning Accessories

ATF Automatic Gearbox Service

Radiator Cleaning Units

Engine Decarbonization

Alternator Test Benches

Injector Cleaning Test Benches

Nitrogen Generators

Headlight Beam Testers

Tyre Lifter

Brake Bleeder

Heating Inductors

Pneumatic Spring Compressor



PRICE LIST 1/1 1/22 - 31/3/23

SPIN s.r.l.

Via Casalecchio 35/G 47924 Rimini (RN) Italy Tel. +39 0541.730777 Fax +39 0541.731315 e-mail: info@spinsrl.it www.spinsrl.it



MADE IN ITALY

ЗАО КВАЛИТЕТ

Россия, 603070, г. Нижний Новгород, Бульвар Мещерский, д.7, корп.3, оф. 30

Тел. +7 (831) 269-80-72, 269-80-73

E-mail: info@qualitet.su Сайт: www.qualitet.su