

Eagle
PROFESSIONAL[®]



SERENCO
SERIOUS TOOLS SERIOUS RESULTS

CATALOG
2023

Eagle Air tools

Eagle the new name for quality hand tools developed for the professional automotive and industrial markets. Benefitting from over 40 years of expertise in these industries manufacturing high quality tools and tool storage. Eagle focusses on product research, design, durability, quality control with a real life testing facility. The core range includes sockets, wrenches, screwdrivers and pliers.

Eagle also manufactures a wide range of professional pneumatic tools. All of these are manufactured to meet or exceed ISO, DIN and other international standards. Eagle Air tools are made for daily use to get the Job done.

Serenco has been around for more than 35 years and that is not without reason:

- Serenco is a leading supplier of professional tools and equipment
- For the car and bicycle industry but also in industry
- More than 2.500 high-quality items in stock
- Fast delivery from stock, to customers in over 48 countries
- All Serenco employees are knowledgeable, service-oriented and above all: proud!

**LET'S
GET
SERIOUS.**

Eagle
PROFESSIONAL[®]

Impact wrenches



1/2" Impact wrench
EG1460A

1/2" Impact wrench
EG2565

3/4" Impact wrench
EG667

Square drive	1/2"	1/2"	3/4"
Air consumption	170 l/m	158 l/m	158 l/m
Air inlet	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar
Work torque	1000 Nm	1283 Nm	1215 Nm
Nut breaking torque	1600 Nm	2100 Nm	2200 Nm
Noise level	100.9 dB(A)	91.5 dB(A)	91,5 dB(A)
No load speed	8500 rpm	8500 rpm	8500 rpm
Vibrations	4.51 m/s ²	8.1 m/s ²	8.1 m/s ²
Weight	2.1 kg	1.65 kg	1.65 kg
Length	185 mm	159 mm	162 mm
Housing	Composite	Composite	Composite
Anvil type	Twin hammer	Twin hammer	Twin hammer



- EG1460A**
- Switch has 3 power settings
 - Ideal for every tire shop/fitter
 - Low vibrations level



- EG2565**
- Switch has 3 power settings
 - Short model for a better reach
 - Ergonomic comfort grip
 - User can be right or left handed
 - Ideal for every tire shop/fitter
 - Low vibrations level

- EG667**
- High performance torque twin hammer mechanism with durable body for heavy duty applications
 - Forward/reverse power regulator with different power setting for maximum power



3/8" Low profile impact socket set 14pc
EG915

- Contents: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm



1/2" Low profile impact socket set 12pc
EG910

- Contents: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 mm



Magnetic tool holder
EG119M

Impact wrenches



1/2" Angle impact wrench
EG558

1/2" Angle impact wrench with swivel head
EG559

1/2" Extra-short impact wrench
EG2460-A

Square drive	1/2"	1/2"	1/2"
Air consumption	160 l/m	160 l/m	134 l/m
Air inlet	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar
No load speed	9000 rpm	8000 rpm	12000 rpm
Work torque	610 Nm	610 Nm	700 Nm
Nut breaking torque			1100 Nm
Noise level	88 dB(A)	90 dB(A)	95 dB(A)
Vibrations	2.8 m/s ²	2.8 m/s ²	4.5 m/s ²
Weight	1.35 kg	1.4 kg	1.3 kg
Length	75 mm (head) / 265 mm	86 mm (head) / 311 mm	96 mm
Housing	Composite	Composite	Composite
Anvil type	Jumbo hammer	Jumbo hammer	Twin hammer



EG558

- An impact wrench with easy access in hard to reach area's
- Workable head is 50 mm high and 75 mm long
- Reactionless torque allows the user to safely use this high impact torque wrench
- Patented cooling system
- Comfortable switch which enables the user to get precise and smooth speed control
- 360° adjustable air exhaust

EG559

- Adjust to angle you desire
- 3 power settings in forward and reverse

EG2460-A

- Extra short body with huge torque output
- Reinforced, lightweight composite housing
- Refined hammer impact mechanism
- 3 power settings in forward, and 1 in reverse
- Variable speed control with tease trigger
- Ergonomic comfort-grip handle

Impact wrenches



Heavy duty 1" impact wrench
EG1663C

Heavy duty 1" impact wrench
EG1665C

Square drive	1"	1"
Air consumption	212 l/m	212 l/m
Air inlet	1/2"	1/2"
Max. air pressure	6.2 bar	6.2 bar
Max. work torque	2970 Nm	2970 Nm
Nut breaking torque	3375 Nm	3375 Nm
Noise level	124.6 dB(A)	96.5 dB(A)
No load speed	5500 rpm	5500 rpm
Vibrations	8.6 m/s ²	8.6 m/s ²
Weight	7.2 kg	6.2 kg
Length	580 mm	425 mm
Housing	Composite	Composite
Anvil type	Twin hammer	Twin hammer

- EG1663C**
- Compact and lightweight
 - High torque output
 - Built-in Power Regulator
 - Regulating throttle provides easy bolt starting
 - 150 mm extended anvil
 - Air hose recommended size: 1/2"

- EG1665C**
- High performance torque twin hammer mechanism with durable body for heavy duty applications
 - Forward/reverse power regulator with different power setting for maximum power

Ratchets



1/4" Mini Ratchet
EG553

3/8" Mini ratchet 1/4" bit drive
EG552

1/4" Stubby ratchet
EG561C


3/8" Stubby ratchet
EG561D

Square drive	1/4"	3/8"	1/4"	3/8"
Air consumption	85 l/m	85 l/m	84 l/m	84 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar
Max. work torque	32 Nm	32 Nm	54 Nm	54 Nm
Noise level	92 dB(A)	92 dB(A)	83 dB(A) Low noise	83 dB(A) Low noise
No load speed	240 rpm	240 rpm	300 rpm	300 rpm
Vibrations	10.5 m/s ²	10.5 m/s ²	3.2 m/s ²	3.2 m/s ²
Weight	0.5 kg	0.5 kg	0.45 kg	0.45 kg
Length	120 mm	120 mm	134 mm	134 mm
Housing	Alu	Alu	Composite	Composite



EG554B (p. 6)

Ratchets

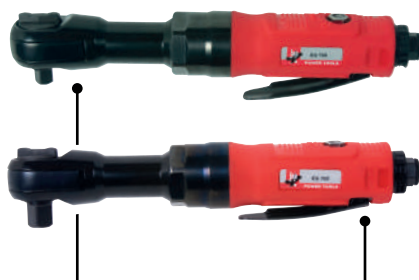

3/8" ratchet
EG700

1/2" ratchet
EG705



3/8" reactionless ratchet
EG554A

1/2" reactionless ratchet
EG554B

Square drive	3/8"	1/2"	3/8"	1/2"
Air consumption	85 l/m	85 l/m	99 l/m	99 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar
Max. work torque	70 Nm	70 Nm	95 Nm	95 Nm
Noise level	85 dB(A)	85 dB(A)	84 dB(A)	84 dB(A)
No load speed	175 rpm	175 rpm	300 rpm	300 rpm
Vibrations	0.4 m/s ² Low vibration	0.4 m/s ² Low vibration	2.2 m/s ² Low vibration	2.2 m/s ² Low vibration
Weight	1.34 kg	1.36 kg	1.46 kg	1.47 kg
Length	264 mm	264 mm	310 mm	310 mm
Housing	Composite	Composite	Composite	Composite

Grinders



Mini angle die grinder
EG125-19R

Mini angle die grinder kit
EG210K-19R

Extended reach cutt-off tool
EG255A

Heavy duty grinder/ cut off tool
EG805

Mini die grinder
EG120ST

Air consumption	59 l/m	105 l/m	116 l/m	142 l/m	85 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar	6.2 bar
Collet size	6 mm	3 & 6 mm	-	-	6 mm
Noise level	82 dB(A) Low noise	85 dB(A)	87 dB(A)	80 dB(A)	85 dB(A)
No load speed	20000 rpm	20000 rpm	14000 rpm	10000 rpm	25000 rpm
Vibrations	0.5 m/s ² Low vibration	0.5 m/s ² Low vibration	1.3 m/s ² Low vibration	0.5 m/s ² Low vibration	0.4 m/s ² Low vibration
Weight	0.7 kg	0.7 kg	1.4 kg	1.5 kg	1.35 kg
Length	155 mm	155 mm	345 mm	244 mm	155 mm
Housing	Composite	Composite	Composite	Composite	Composite



Mini die grinder kit 15pc
EG120K-19R

- Contents:
- NI231TU
 - 1/4" Mini die grinder
 - 10 grinding stones
 - 3 & 6 mm collet size



- EG255A**
- This tool is intended for the cutting of metal parts in combination with good quality proper fitting cut-off wheels.
- Comfort grip
 - Rear exhaust
 - Air regulator on top
 - Adjustable guard
 - Max. disc size 100 mm
 - Spindle size 6 mm



125 mm

- EG805**
- Composite housing
 - Axle size 22 mm
 - Max. disc size 125 mm

- EG120ST**
- Ergonomic cushion-grip handles insulate against vibration, reducing operator fatigue
- Power/speed regulator allows for easy rpm adjustment
 - Rear exhaust directed away from the user and the working areas
 - Twin bearing spindle, results in super precise spindle concentricity and minimal vibration

Cut off tools



75 mm Cut-off tool
EG250-19R

Airsaw
EG178A

Mini pro sander
EG1060

Mini pro polisher
EG1062

Air consumption	85 l/m	113 l/m	57 l/m	61 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar
Noise level	87 dB(A)	86 dB(A)	89.4 dB(A)	89.4 dB(A)
No load speed	21000 rpm	9000 blows p/m	15000 blows p/m	6000 blows p/m
Vibrations	0.8 m/s ² Low vibration	8.5 m/s ²	< 2.5 m/s ² Low vibration	< 2.5 m/s ² Low vibration
Weight	0.75 kg	0.80 kg	0.46 kg	0.7 kg
Length	193 mm	160 mm	109 mm	130 mm
Housing	Composite	Alu with insulated soft grip handle	Composite	Composite



EG250-19R

The ultimate heavy duty cut-off tool featuring:

- Stall torque resistance - Twice that of regular tools
- Powerful twin-chamber motor
Delivers much higher torque and power than that of conventional air motor - Significantly increasing efficiency
- Ergonomic comfort-grip handle
Maintains a comfortable temperature during operation and insulates against vibration



EG178A

- Suitable for reciprocating saw blades and files
- Capacity: 3 mm
- Stroke 110 mm
- Incl. 24 and 32 teeth saw blade and 5 mm file

EG1060

- Sanding pad 50 or 75 mm



50mm backing pad for EG1060
EGD001021060



75mm backing pad for EG1060
EGD001031060

EG1062

- Polisher pad 50 or 75 mm



Velcro disk 50 mm for EG1062
EG1062-2

Velcro disk 75mm for EG1062
EG1062-3

Drills



Reversible drill 10 mm
EG213-19R



90° Angle drill 10 mm
EG225-19R



Spot weld drill, Boron killer, uses tungsten carbide drills
EG327HN

Air consumption	100 l/m	85 l/m	170 l/m
Air inlet	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar
Chuck size	10 mm	10 mm	-
Noise level	90 dB(A)	83 dB(A) Low noise	90 dB(A)
No load speed	1800 rpm	1800 rpm	1100 rpm
Vibrations	0.4 m/s ² Low vibration	0.6 m/s ² Low vibration	0.3 m/s ² Low vibration
Weight	0.9 kg	1.1 kg	2.1 kg
Length	195 mm	220 mm	252 mm
Housing	Composite	Composite	Composite

EG213-19R

- Ergonomic comfort-grip handle maintains a comfortable temperature during operation and insulates against vibration

EG225-19R

- Low noise

EG327HN

- Ideal for speedy removal of spot welds on vehicle bodywork, incl. Boron steel
- Newly designed high efficient motor submit greater power
- Two-tier planetary gear system triple the output torque to meet the requirement of drilling high strength bodymaterial Stainless steel (BTR), Boron steel and USIBOR etc
- Floating spindle isolated from motor and gear system to reduce the vibration to the minimum
- Variable speed throttle control allows easy operation
- Control collar (feeding adjustable ring) allows precise setting of drilling depth
- The Brace & Feeder Assembly can be rotated 360 degree and removed, and also prevent side-slipping of drill when working to constant pressure
- With one piece of HSS drilling bit (8 mm shank x 8.0 mm)
- Ideal suited for internal and external spot welds
- Tungsten drill bit last 10 times longer than normal HSS drill bit



EG558 (p. 4)

Sanders



**Orbital sander
central vacuum
2.5 mm orbit**
EG01-3-C6-19R

**Orbital sander
central vacuum
5 mm orbit**
EG01-C6-19R

Belt sander 10 mm
EG706A

Belt sander 20 mm
EG708A

Air consumption	310 l/m	310 l/m	57 l/m	70 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar
No load speed	10000 rpm	10000 rpm	18000 rpm	18000 rpm
Noise level	80 dB(A) Low noise	80 dB(A) Low noise	80 dB(A) Low noise	80 dB(A) Low noise
Sanding stroke	2.5 mm	5 mm		
Belt width			10 mm	20 mm
Vibrations	0.8 m/s ² Low vibration	0.8 m/s ² Low vibration	2 m/s ² Low vibration	2 m/s ² Low vibration
Weight	0.9 kg	0.9 kg	0.77 kg	0.96 kg
Length			325 mm	396 mm
Housing	Composite	Composite	Composite	Composite

EG01-3-C6-19R/ EG01-C6-19R

This tool is intended for sanding in combination with good quality proper fitting accessories. Use 150 mm diameter 15 hole Velcro sanding discs.

- 2.5 mm/5 mm Ø orbit
- Well-balanced
- 360° Air exhaust
- Low vibration
- Central Vacuum
- Lightweight composite housing
- Pad diameter 150 mm



**Sanding pad
(15 holes)**
EG-BTOB15

EG706A/ EG708A

- Quick release function for changing the belt
- Quick angle adjustment 360°



Tools for the specialist

Surface Preparation tool without vacuum

EG280



- This tool is intended for removing striping of vehicles in combination with an eraser wheel.

Air consumption	100 l/m
Air inlet	1/4"
Max. air pressure	6.2 bar
No load speed	4000 rpm
Noise level	85 dB(A)
Vibrations	0.5 m/s ² Low vibration
Weight	1.2 kg
Length	254 mm



Surface Preparation tool without vacuum - set

EG280K-6

This tool is intended for removing striping of vehicles in combination with the supplied eraser wheel.

- Different type wheels (for the preparation of metal surfaces prior to remedial work)
- Safety guard (protecting user from debris/sparks)
- Safety throttle lever
- Rear exhaust
- Wire brush - rush and coatings
- Rubber eraser - striping, sticker, tape and glue
- Conditional wheel - general preparation and sanding
- Threat size 6 mm adapter

With vacuum



Surface Preparation tool with vacuum - set

EG280CK-6

This tool is intended for removing striping of vehicles in combination with the supplied eraser wheel.

- Different type wheels (for the preparation of metal surfaces prior to remedial work)
- Safety guard (protecting user from debris/sparks)
- Safety throttle lever
- Rear exhaust
- Wire brush - rush and coatings
- Rubber eraser - striping, sticker, tape and glue
- Conditional wheel - general preparation and sanding
- Threat size 6 mm adapter

Tools for the specialist




Smart Eraser
EG260S-19R

Pneumatic angular stripping remover
EG2260E

Needle scaler
EG671CF

Needle scaler pistol grip
EG672CF

Air consumption	85 l/m	99 l/m	280 l/m	280 l/m
Air inlet	1/4"	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar	6.2 bar
Noise level	84 dB(A)	86 dB(A)	96.6 dB(A)	96.6 dB(A)
No load speed	2600 rpm	2500 rpm	3700 blows p/m	3700 blows p/m
Vibrations	0.7 m/s ² Low vibration	1.2 m/s ² Low vibration	6.9 m/s ²	6.9 m/s ²
Weight	1 kg	1 kg	2.4 kg	2.6 kg
Length	225 mm	220 mm	370 mm	335 mm
Housing	Composite	Composite	Steel	Steel with insulated soft grip handle



EG260S-19R

- Designed to get rid of any kind of marks on plastic or painted surfaces
- Removal of marks is very fast, without damaging the surface
- Rubber eraser - striping, sticker, tape and glue

EG2260E

- Designed to get rid of any kind of marks on plastic or painted surfaces
- Ideal for larger surfaces
- Removal of marks is very fast, without damaging the surface
- Rubber eraser - striping, sticker, tape and glue

EG671CF/ EG672CF

- Tool is used for aggressive material removal such as rust
- Needle action ideal on irregular surfaces such as cracks or slots
- 19 needles



EG2565 (p. 3)



Engraving pen (scriber)
EG6062



Punch and flange tool
EG01-009-0009



EG6062

- Engraving on the hardest materials: steel, stone and ceramics



EG01-009-0009

- Capacity: 1.2 mm (Steel)
2.0 mm (Aluminum)
- Punch: 5 mm

Air consumption	74 l/m		57 l/m	
Air inlet	1/4"		1/4"	
Max. air pressure	6.2 bar		6.2 bar	
Noise level	76 dB(A)	Low noise	76 dB(A)	Low noise
No load speed	13000 blows p/m		-	
Vibrations	0.7 m/s ²	Low vibration	2.5 m/s ²	Low vibration
Weight	0.22 kg		1.25 kg	
Length	140 mm		248 mm	

Tools for the specialist



Nibbler
EG175HY



Shear
EG320



Hammer kit
EG-01-06-0012

Air consumption	85 l/m	85 l/m	269 l/m
Air inlet	1/4"	1/4"	1/4"
Max. air pressure	6.2 bar	6.2 bar	6.2 bar
Capacity	1.5 mm	Steel: 1.2 mm - Alu: 1.6 mm	-
Noise level	90 dB(A)	86 dB(A)	94 dB(A)
No load speed	2600 rpm	2600 rpm	4300 blows p/m
Vibrations	0.8 m/s ² Low vibration	0.7 m/s ² Low vibration	15 m/s ²
Weight	1 kg	1 kg	2.45 kg
Length	178 mm	240 mm	320x240 mm
Housing	Composite	Composite	Composite



EG175HY

- Ideal for trimming, outlining and shearing various sheet metal
- Lightweight and durable grip for great control
- Heavy duty cutting blades make clean cut in cold rolled steel up to 1.5 mm
- Polyurethane handle helps maintain temperature and insulate against vibration
- 0.9 meter/min



EG320

- Lightweight and durable pistol grip for great control
- Heavy duty cutting blades make clean cut in cold rolled steel up to steel: 1.2 mm - Alu: 1.6 mm
- Polyurethane handle helps maintain temperature and insulate against vibration
- Ideal for trimming, outlining and shearing various sheet metal



EG-01-06-0012

- Includes spring and 5 chisels and spring retainer
- Drive: Hexagon
- Ideal for separating ball joints, bushing removal, cutting panels and spot weld removal

Tools for the specialist



**Oscillating knife kit
(wind shield cutter)**
EG308



Caulking gun
EG195

Air consumption	113 l/m	
Air inlet	1/4"	1/4"
Max. air pressure	6.2 bar	2.5 - 5.1 bar
Noise level	89 dB(A)	-
No load speed	20000 rpm	-
Vibrations	2.2 m/s ²	0.08 m/s ²
Capacity		310 ml cartridges
Weight	0.97 kg	1.1 kg
Length	195 mm	325 mm



EG308

- 57 mm straight blade
- 30 mm blend blade



EG195

- One finger trigger to feed the material for construction and automotive repair
- Capacity: 310 ml
- Pressure: 2.5 ~ 5.1 bar

Tools for the specialist

Blind riviter, 2.4 - 4.8mm

EG101

- Pneumatic / hydraulic for blind rivet work
- 4 jaws (one pre-assembled)
- Robust metal housing with insulated soft grip
- Swivel joint coupling for flexible use
- Incl. air nipple
- Rivet sizes: 2.4 - 3.2 - 4.0 - 4.8mm

High torque force	11945 N
Stroke length	14 mm
Air inlet	1/4"
Max air pressure	6.2
Weight	1.500 g

Capacity

- Aluminium rivets: 2.4 - 4.8 mm
- Steel rivets: 2.4 - 4.8 mm
- Stainless steel rivets: 2.4 - 3.2 mm



Blowguns



Pocket blowgun
EG001B71S

Blow gun with bent steel tube
EG001B13G

Blowgun with extendable tube
EG001B35

Blowgun with steel tube
EG001B91B

Max. air pressure	6.2 bar	12 bar	12 bar	15 bar
Length	109 mm	100 mm	270-400mm	250 mm
Housing	Alu	Pom	Pom	Pom

EG001B71S

- Practical and compact design
- Turn front nose piece to adjust air flow
- Alu housing

EG001B13G

- Lightweight and easy to use



EG001B35

- 360° adjustable
- 270-400mm extendable



EG001B91B

- 250mm long
- For hard to reach access



Air pressure filter



Air pressure filter-reducer with manometer, Oil lubricator
EG001894

Air pressure filter-reducer with manometer
EG001892

Air connection	1/2"	1/4"
Air flow rate at 6.2 bar	3000 L/min	1750 L/min
Filling capacity filter pressure reducer	80 ml	80 ml
Filling capacity mist lubricator	150 ml	-
Max. pressure	15.2 bar	12 bar
Max. working pressure	10 bar	10 bar
Pressure indicator	0.5 - 12 bar	0.5 - 12 bar
Drainage capacity	80 ml	80 ml
Oil capacity	150 ml	-



Mini oiler /Lubricator

EG001122

Air connection	1/4"
Max. pressure	6 bar
Oil capacity	5.5 ml

Accessories



**Hammer chisel
125 mm, 4pc**
EG32-1491

- For EG-01-06-0012



**Hammer chisel
175 mm, 5pc**
EG32-1490

- For EG-01-06-0012



**Quick-release
retainer chuck**
EG32-1488

- For EG-01-06-0012



Spring retainer
EG32-1489

- For EG-01-06-0012



**Jacobs Keyless
Chuck 10 mm**
EG32-1484

- For EG213-19R, EG225-19R and EG327HN



**Replacement
needle**
EG19CF

- For EG671CF and EG672CF



**Engraving
needle**
EG6062-14

- For EG6062



**75 mm
Cutting disc**
EG954

- For EG250-19R



**Velcro disk
15 holes**
EG-BTOB15

- For EG01-3-C6-19R and EG01-C6-19R



Rubber wheel
EG32-1492

- For EG260S-19R



Backing pad for EG1060

- For EG1060

50 mm [EGD001021060](#)
75 mm [EGD001031060](#)



Blade 57 mm

- For EG308

[EG307008-K01A](#)



Blade

- For EG308

18 mm [EG307008-K02A](#)
36 mm [EG307008-K02B](#)
63 mm [EG307008-K02C](#)
90 mm [EG307008-K02D](#)



Blade 30 mm
[Ez08-K03A](#)

- For EG308



Blade 8 mm
[EG307008-K04A](#)

- For EG308



Blade 35 mm
[EG307008-K05A](#)

- For EG308
- Straight



Blade 35 mm
[EG307008-K06A](#)

- For EG308
- Serrated



Blade 35 mm
[EG307008-K07A](#)

- For EG308
- Slightly bent



Blade 24 mm
[EG307008-K08A](#)

- For EG308

Rubber wheel Ø 103 mm

EGBT246655

- For EG280



Eraser

EG26036-7

- For EG280



Adapter

EGBT-ADPT

- For EG280



Nylon wheel

EGSTBT246652

- For EG280



Wire wheel

EGBTWW103-SERIE

- For EG280



Fine
Medium

EGBTWW103-235
EGBTWW103-2355

Wire wheel - coarse

EGBTWW103-237

- For EG280



File

EG351043

- For EG178A



Set of replacement grinding stones, 10pc

EGPF2001

- For EG120ST, EG120K-19R, EG125-19R
and EG210-19R



Saw

EGBEZD30-SERIE

- For EG178A



Saw 18-t 5pc EGBEZD3018A
Saw 24-t 5pc EGBEZD3024A
Saw 32-t 5pc EGBEZD3032A

Drill

EG327BH-SERIE

- For EG327HN



Titanium coated EG327BH-65K
Ø 6,5 mm 5pc
Titanium coated EG327BH-80K
Ø 8 mm 5pc

Grinding belt

EG7070007P-SERIE

- For EG708A



20x520 mm - P40 EG7070007P40
20x520 mm - P60 EG7070007P60
20x520 mm - P80 EG7070007P80
20x520 mm - P120 EG7070007P120

Grinding belt

EG702A001P-SERIE

- For EG706A



10x330 mm - P40 EG702A001P40
10x330 mm - P60 EG702A001P60
10x330 mm - P80 EG702A001P80
10x3300 mm - P120 EG702A001P120

Tungsten- carbide Ø 8 mm

EG327B-TC1

- For EG327HN



Drill

EG317043-SERIE

- For EG327HN



Drill Ø 6,5 mm EG317043A
Drill Ø 8 mm EG317043
Drill Ø 10 mm EG317043B

Collet

EG21036-SERIE

- EG120ST, EG125-19R and EG210-19R



Collet Ø 3 mm EG21036-2
Collet Ø 6 mm EG21036

SERENCO

SERIOUS TOOLS SERIOUS RESULTS

This brochure is an edition of Serenco Nederland B.V.
Maarssebroeksedijk 39 • 3542 DM UTRECHT • Tel. +31 (0)30 2415011 • www.serenco.nl • sales@serenco.nl

Serenco Nederland reserve the right to change any prices or specification without prior notice. Prices are excl. VAT. Images and specifications are made in good faith and are subject to change. Stock is subject to availability, products may be discontinued at any time. Valid till 31/03/2023. While stock last.

EN_V1_2023/05

DEALER